




IS3020

IS3021


Fitting Instruction

Door Bottom or Meeting Stile

Length	mm
--------	----



IS3020



IS3021


DESCRIPTION OF CONTENTS

- Aluminium carrier (1)
- Pre-slotted holes (2)
- Flexible "Push-fit" gasket (3)
- Bag of screws
- Fitting instructions

TOOLS REQUIRED FOR INSTALLATION

- Tape measure
- Saw (power or hand)
- Screw driver
- Drill (power or hand)
- Knife
- Pencil or marker
- Router

MEETING STILE INSTALLATION DETAIL

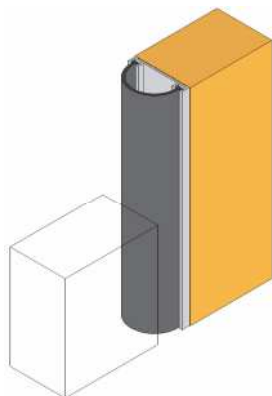

STEP 1

Measure door height and cut the seal to suit, using a sharp knife for the rubber seal and a saw (power or hand) for the aluminium section.

STEP 2

Remove the rubber seal and screw fix the aluminium section onto the stile using the screws supplied (fixing holes are pre-slotted.)

STEP 3


Replace rubber sealing element to form "U" section.

NB: The rubber gasket simply presses back into the profile.

STEP 4

Ends of the aluminium channel can be centre punched to prevent seal movement

DOOR BOTTOM INSTALLATION DETAIL

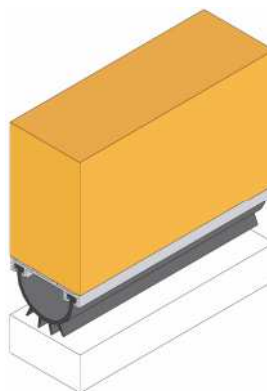

STEP 1

If installed, remove door from its hinge, lay door on its edge and firmly restrain.

STEP 2

Measure door width and cut the seal to suit, using a sharp knife for the rubber seal and a saw (power or hand) for the aluminium section.

STEP 3

Remove the rubber seal and screw fix the aluminium section onto the door bottom using the screws supplied (fixing holes are pre-drilled)

STEP 4

Replace rubber sealing element to form "U" section.
NB: The rubber gasket simply presses back into the profile.

STEP 5

Re-hang the door. Ends of the aluminium channel can be centre punched to prevent seal movement.

IMPORTANT – Ensure that the installation of this product does not impede the opening or closing of the door. It is recommended to check the adjustment of the door seal periodically to ensure the door assembly to which it is fitted, closes and latches properly.

The seal may be removed for periodic cleaning or replacement of a worn gasket, without removing the door leaf from its frame.

We recommend the IS3020 or IS3021 be used together with a Lorient Integrity™ 4000 series threshold plate.

OTHER INTEGRITY™ ARCHITECTURAL SEALS INCLUDE:

- Door Perimeter Seals
- Door Bottom Seals
- Automatic Door Bottom Seals
- Threshold Plates
- Brush Seals
- Magnetic Seals

Contact your nearest Lorient office for further details.

NOTE

Recommendations as to methods for use of materials and construction details are based on the experience and knowledge of Lorient and are given in good faith as a general guide and service to designers, contractors and manufacturers.

Lorient reserves the right to make alterations or delete any installation detail without prior notice.

AUSTRALIA
Lorient Australia Pty Ltd

QLD: (61-7) 3635 5000
NSW: (61-2) 9907 3844
VIC: (61-3) 9785 2688

ASIA PACIFIC—Hong Kong
Lorient Pacific Limited

Tel: (852) 2505 0328

EUROPE—UK
Lorient Polyproducts Limited

Tel: (44-1626) 834252

www.lorient.com.au

