


Introducing the DS Door Edge Protector



Some doors suffer severe damage to the leading edge due to heavy volumes of pedestrian and wheeled traffic. New test evidence means that Lorient's Edge Protector now incorporates the innovative DS seal; together they offer superior combined protection against damage, fire, smoke, sound and germs.

Key Benefits

- Protects door edges against impact damage, to retain the door's appearance.
- Cost effective - it reduces the need to replace the door
- Successfully fire and smoke tested to BS 476 Pt.22: 1987, meeting the requirements of Approved Document B.
- Fire resistance provided for 30 or 60 minute applications.
- Superior acoustic performance is provided by the unique dual fins on the DS seal - meeting the requirements of Approved Document E.
- Low frictional elastomeric fins enable ease of door operation (Approved Document M).
- Hygienic - the DS seal is easy to wipe clean.
- Easy to install to new or existing doors.
- Low maintenance.

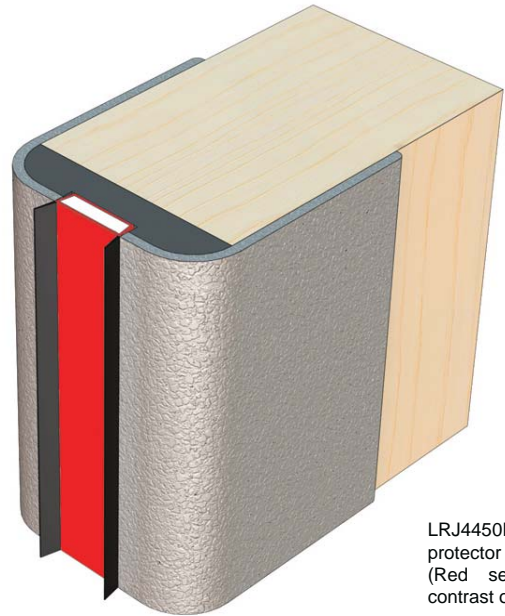

LRJ4450R door edge protector & LP1504DS (Red seal to show contrast of fins)

Specifications

- Manufactured from heavy duty, impact resistant vinyl material, with a textured finish to reduce scuff marks.
- Edge protector is available in two finishes, Hessian (textured) and Falmouth (smoother with light stippling).
- Designed to suit nom. 44mm door thickness (FD30) and 54mm thickness (FD60). Also incorporates a margin for inevitable variations in door thickness up to 62mm.
- Available with radius or square edges (as standard); Double Swing type also available.
- Suitable for laminated softwood or hardwood, flaxboard or particleboard or solid homogeneous particleboard doors.
- Can be supplied in standard leg lengths between 32mm and 50mm.
- 2.4m maximum length; can be supplied to suit 2.1m - 2.4m doors.
- Sizes available are (FD30) 15mm x 4mm and (FD60) 20mm x 4mm.
- For pairs of doors, one door leaf should be fitted with a fire seal only Edge Protector and the other should be fitted with a DS seal Edge Protector.
- Fire seal only and brush type smoke seals also available.
- Range of matching items available, including push plates, kick plates and door panels.

Fitting Instructions

- Full fitting instructions are supplied with the product and are available on request. Please refer to fitting instructions before commencing installation.



Lorient Polyproducts Ltd

Endeavour House, Fairfax Road, Heathfield Industrial Estate, Newton Abbot, Devon, TQ12 6UD

Tel: +44 (0)1626 834252 Fax: +44 (0)1626 833166

e-mail: mktg@lorientuk.com

www.lorientuk.com

