


**IS6020 Magnetic Seal for Meeting Stiles**  
Medium Duty



This seal is an effective acoustic seal when tested in accordance with BS EN ISO 140-3: 1995. See Acoustic Sealing Systems for Door Assemblies manual for further details.



IS6020

■ **Location**

Rebated meeting stiles of double leaf doors.  
Sliding doors.

■ **Seal material**

Grey silicone rubber. Black insert to special order.

■ **Standard lengths**

2.1m. Other lengths to special order.

■ **Fixing**

The aluminium trough is toothed to lock into a 16mm x 12mm groove. The magnetic seals are also 'locked' in to prevent creeping.

■ **Finish**


Silver anodised aluminium with grey insert. Black insert to special order.

*Note: not suitable where centre latching is required.*

■ **Acoustic performance**

Weighted Sound Reduction (R<sub>w</sub>): 30dB

Sound Transmission Class (STC): 30dB

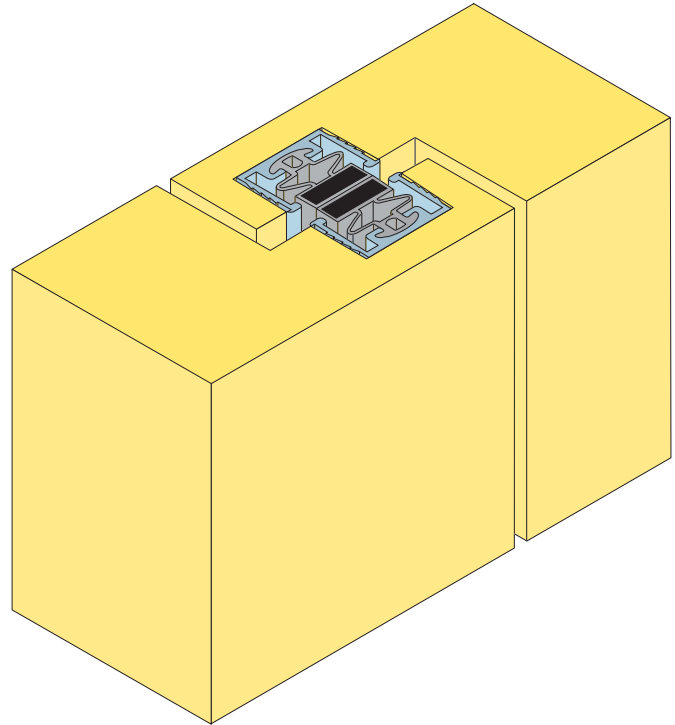

Standard  
Architectural Solid Core Door

