


**IS7061 Perimeter Seal**

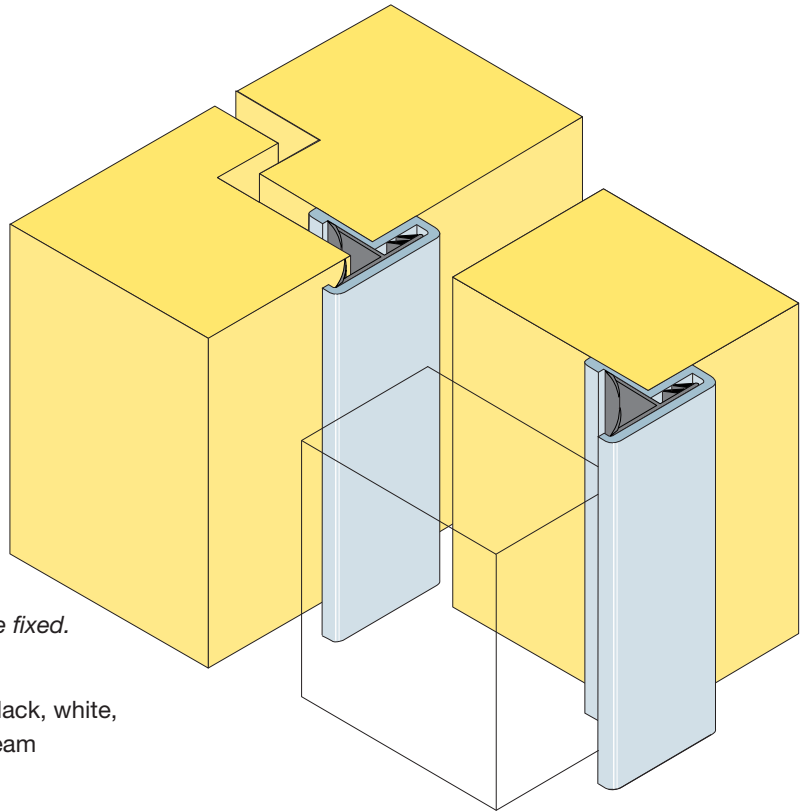
Medium Duty



Suitable for use on either plain or rebated meeting stiles. The leg can be cut out to make way for locks and latches. It can be rebated or face fixed. Tested in accordance with BS EN ISO 140-3: 1995. See Acoustic Sealing Systems for Door Assemblies manual for further details.



IS7061


**Location**

Meeting stiles of single swing doors.

**Seal material**

Extruded elastomeric rubber.

**Standard lengths**

1m and 2.1m.

**Fixing**

Wood screws are supplied (self-tapping screws for metal frames are available on request). Fixing holes are pre-drilled and countersunk. Once the aluminium carrier is fixed, the seal component can be snapped easily into place, due to its unique, 'push-fit' design.

*Note: A door selector should be considered unless one leaf is intended to be fixed.*

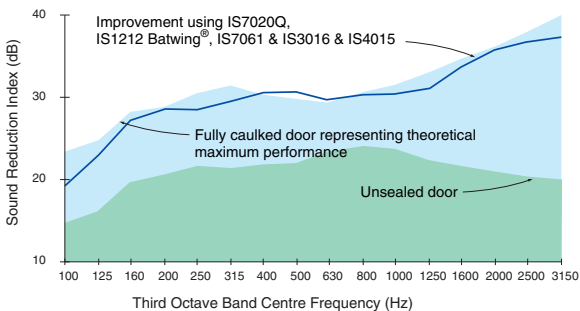
**Finishes**

Silver or bronze anodised aluminium with black, white, dark brown, light brown, grey, silver and cream Batwing® insert.

**Acoustic performance**

Weighted Sound Reduction Index (Rw): 33dB.  
Sound Transmission Class (STC): 33dB.

Weighted Sound Reduction Index (Rw): 37dB.  
Sound Transmission Class (STC): 37dB.

**Standard Architectural Solid Core Door**

**High Performance Acoustic Door Construction**
