

IS7090 si Perimeter Seal

Heavy Duty



A tamper-proof seal with a neat, snap-on cover plate to conceal fixing screws, presents an exceptionally smooth external aspect. Unique spring-loaded mechanism, automatically self-adjusts to cater for movement or uneven doors.

Tested in accordance with BS EN ISO 140-3:1995. See Acoustic Sealing Systems for Door Assemblies manual for further details.

Meets the smoke leakage performance requirements of BS5588 when tested in accordance with BS 476 Pt 31.1.

■ **Location**

Single swing doors.

■ **Min/max gap size**

3mm/8mm.

■ **Seal material**

Silicone rubber.

■ **Standard lengths**

1m and 2.1m. Single doorset pack consisting of 1 x 1m and 2 x 2.1m. Other lengths to special order.

■ **Fixing**

Wood screws are supplied (self-tapping screws for metal frames are available on request). Fixing holes are pre-drilled.


■ **Finish**

Silver anodised aluminium with grey silicone rubber gasket or bronze anodised aluminium with black silicone rubber gasket. Special colours can be supplied using a powder coated finish for additional aesthetics.

■ **Acoustic performance**

Weighted Sound Reduction Index (Rw): 31dB.

Sound Transmission Class (STC): 31dB.

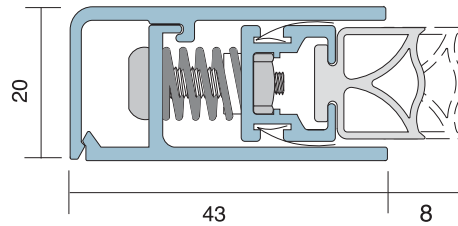

IS7090 si

