

### IS8080 si Automatic Threshold (Door Bottom) Seal Light to Medium Duty



An automatic door bottom seal which is face-fixed to the bottom edge of single action doors. It operates automatically by a spring loaded mechanism which lifts the seal clear of the floor as soon as the door is opened. It also meets the smoke leakage performance requirements of BS 5588 when tested in accordance with BS 476 Pt.31.1 and AS 1530.7.

■ **Location**

Single swing doors.

■ **Use with**

Any perimeter seal and threshold plate (7000 and 4000 series).

■ **Min/max gap size**

1mm/12mm.

■ **Seal material**

Flexible silicone rubber.

■ **Standard lengths**

915mm, 1220mm

*Note: Seals can be cut on-site for an exact fit.  
Minimum length 450mm.*

■ **Fixing**


Fixing screws are supplied, fixing holes are pre-drilled. Striker button, which locates in the door stop, is supplied.

■ **Adjustment**

Self-levelling on uneven surfaces. Adjustment can be carried out without removing the product from the door.

■ **Finish**

Silver anodised aluminium with grey cover strip. High performance grey silicone rubber gasket supplied as standard.

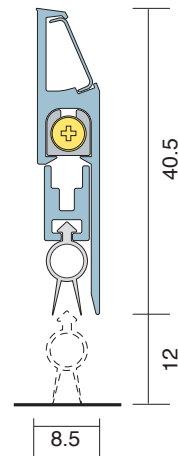

IS8080 si

