



PLANET

DROP SEALS

DROP

SEALS





GLASS DOORS

A range of drop seals for glass doors that fit to the bottom of a door and drop down automatically when the door closes to form a firm seal.

A spring-loaded mechanism, requiring no power, ensures easy door operation and effective sealing when closed.

Drop seals for glass doors

Engineered for seamless integration, Planet KG-F, KG-A, and KG-S narrow drop seals deliver up to 48dB sound insulation with a slim profile ideal for glass doors. Available in a range of lengths and finishes to suit bespoke applications.





Planet KG-F8 | F10 narrow, Planet KG-F12s | F16s

- ▶ For single-leaf and double-leaf all-glass doors with 8, 10, 12 and 16mm glass thickness (16mm glass thickness is suitable for fire doors).
- ▶ Drop seal for attaching and gluing (VHB)
- ▶ Suitable for ESG safety glass and VSG multiple-walled glass widths.

Options

- ▶ Seal material: **RD**: High-quality silicone or **FH+RD**: High-quality self-extinguishing silicone.
- ▶ Carrier: Silver anodised finish (EV1) or stainless steel satin anodised (INOX).

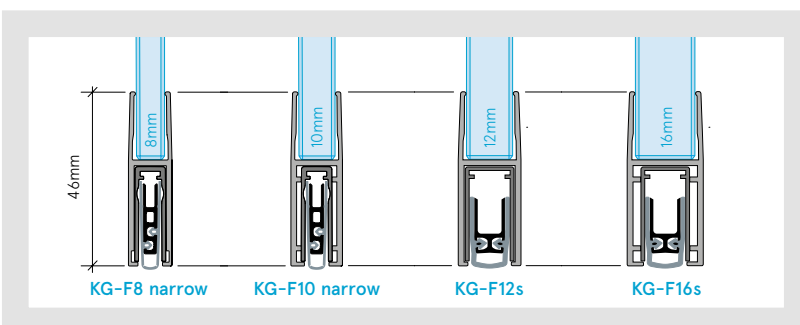


Planet KG-A8 | KG-A10 | KG-A12 narrow

- ▶ For single-leaf and double-leaf all-glass doors with 8, 10 and 12mm glass thickness
- ▶ Drop seal for attaching and gluing (VHB)
- ▶ Ready for use immediately after installation thanks to the fixing screws supplied
- ▶ Suitable for ESG safety glass and VSG multiple-walled glass widths.

Options

- ▶ Seal material: **RD**: High-quality silicone or **FH+RD**: High-quality self-extinguishing silicone.
- ▶ Carrier: Silver anodised finish EV1 or stainless steel satin anodised (INOX).




Planet KG-S narrow


- ▶ Suitable for all glass thicknesses, also for wooden, PVC and metal doors
- ▶ Glued on the side with UV glue or double-sided tape
- ▶ Ready for use immediately after installation thanks to the fixing screws supplied
- ▶ Suitable for ESG safety glass and VSG multiple-walled glass widths.

Options

- ▶ Seal material: **RD**: High-quality silicone or **FH+RD**: High-quality self-extinguishing silicone.
- ▶ Carrier: Silver anodised finish EV1, stainless steel satin anodised (INOX), or black C35 satin anodised

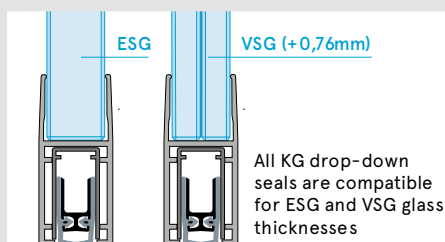

Also available:



Planet KG-SM set, narrow, the complete set with everything you need for quick and easy installation of the KG-S narrow seal.

Versions: Surface silver anodised finish EV1, black C35 satin anodised or stainless steel satin anodised (INOX)

Thanks to the new mechanical fixation, our seals for glass doors are even easier to mount!


With the optimised seals for glass doors, even more time can now be saved during installation, as glue, silicone or UV adhesive can be dispensed with completely, thus eliminating waiting times for drying.

Assembly

Planet **KG-S narrow** Planet **KG-SM-Set narrow**

Advantages:

- Enables DIN L and DIN R to be changed
- Easy to replace at any time
- Individual special colours available
- Easy to retrofit

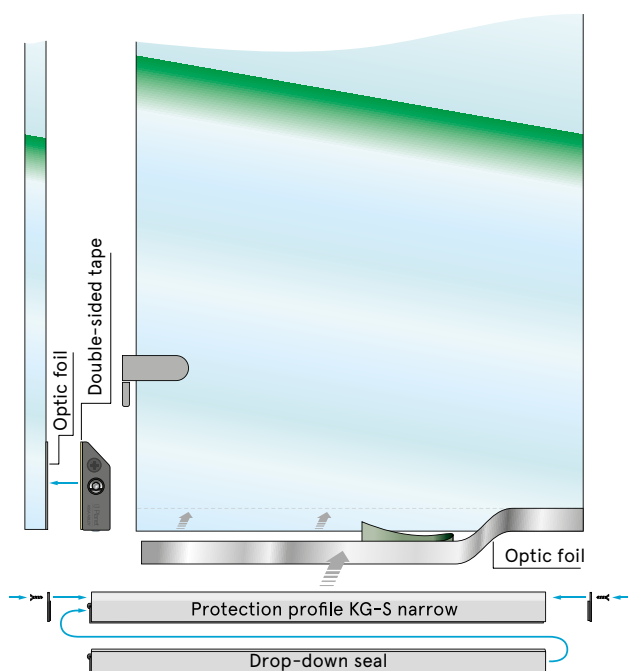


Simple installation (Illustration KG-SM-Set):

1. Attach the optical foil
2. Screw on the cover plates
3. Glue on the protection profile
4. Done!

Planet **KG-A narrow** Planet **A10 | A12 narrow**

Advantages:



- Enables DIN L and DIN R to be changed
- Easy to replace at any time
- Individual special colours available

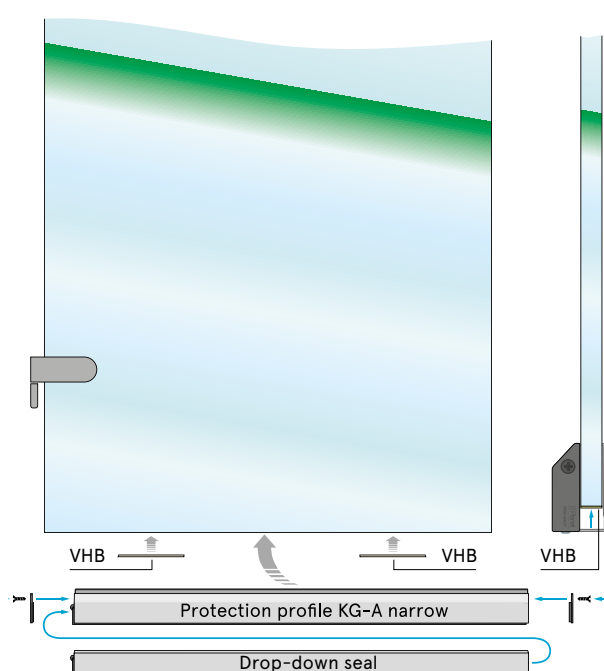

Simple installation:

1. Attach double-sided VHB adhesive tape to glass
2. Screw on the cover plates
3. Glue on protection profile
4. Done!

Order length (view from above)

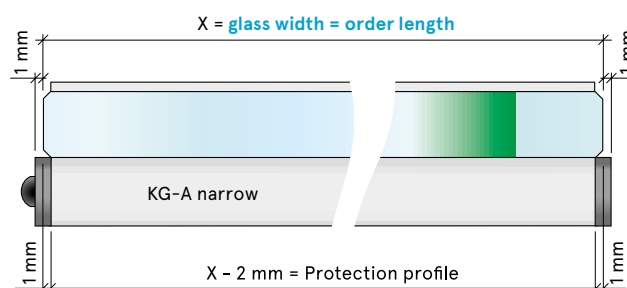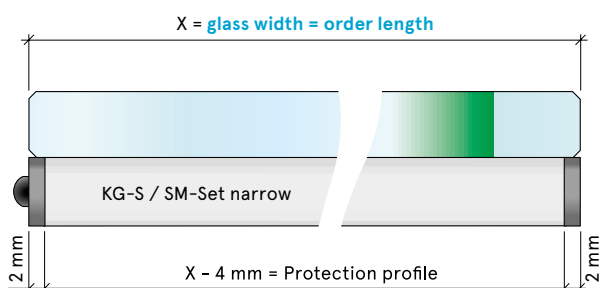


Planet KG-SM Set Narrow

FACE-FIXED



48dB

A slimline, face-fixed automatic drop seal designed for glass, timber, metal, and PVC doors. Its ultra-narrow 11.5mm profile makes it ideal for minimalistic applications. Featuring a high-efficiency mechanism with a single-sided trigger, it enables parallel lowering and automatic compensation for sloping floors. Suitable for doors with a seal height of up to 16mm. Fixing tape allows for quick and easy installation on new and existing doors. An optional bevel lip is available for uneven floors, accommodating gaps of up to 20mm.

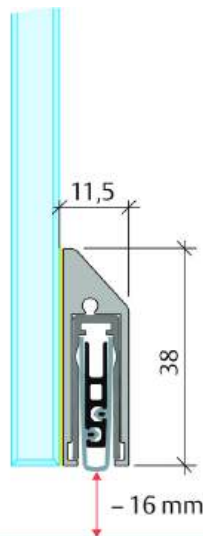

Planet KG-SM Set Narrow Drop Seal



Planet KG-SM Set Narrow



SYSTEM SPECIFICATIONS

Key benefits

- ▶ Elegant architectural design solution.
- ▶ For new and existing doors.
- ▶ Unilateral and silent actuation.
- ▶ No scraping / trailing on the floor, thanks to parallel drop.
- ▶ High-quality silicone lip, lateral protrusion adjustable.
- ▶ Can be shortened to the next smaller stock length.

Characteristics

- ▶ Suitable for use on glass, timber, metal & PVC doors.
- ▶ Sound insulation up to 48dB

Possible door types (depending on options)

- ▶ Single swing doors, double swing doors, sliding doors.

Profile size

- ▶ 11.5mm x 38mm.

Max drop height

- ▶ 16mm.

Profile material

- ▶ Aluminium.

Seal material

- ▶ **Planet KG-SM set narrow FH+RD:** High-quality self-extinguishing silicone with aluminium carrier.
- ▶ Bevel lip available for uneven floors (Left-handed or right-handed variants).

Adjustment

- ▶ Self-levelling on uneven surfaces.
- ▶ Automatic compensation of sloped floors.
- ▶ Easy drop height adjustment.
- ▶ Door bottom can be adjusted without seal removal.

Drop height adjustment

- ▶ Using 3mm allen key.

Standard lengths

- ▶ 459mm, 584mm, 709mm, 834mm, 959mm, 1084mm, 1209mm, 1334mm, 1459mm.
- ▶ Note: Each length can be cut back by 125mm.
- ▶ Sizes up to 6m are available to special order.

Fixing

- ▶ Glued to the side with double adhesive tape (supplied).

Accessories (supplied)

- ▶ Complete set consisting of drop-down seal, protection profile with prepared double adhesive tape, cover plates, stopping plates, fixing screws, optical film, Allen key.

Finishes

- ▶ Silver anodised EV1 as standard.
- ▶ Matt anodised stainless steel (INOX) or black C35 matt anodised or special colours powder coated (RAL / DB / NCS) to special order.

Planet KG-SM Set Narrow

HOW TO ORDER

Planet KG-SM Set Narrow FH + RD

		SILVER ANODISED		MATT STAINLESS STEEL		BLACK	
Length	Max cut back	Item No.	Order code	Item No.	Order code	Item No.	Order code
400mm	-	35040-SM	PLA835/0400-SMA00	35040-SMX	PLA835/0400-SMH00	35040-SMB	PLA835/0400-SMN00
459mm	>335mm	35046-SM	PLA835/0459-SMA00	35046-SMX	PLA835/0459-SMH00	35046-SMB	PLA835/0459-SMN00
584mm	>460mm	35059-SM	PLA835/0584-SMA00	35059-SMX	PLA835/0584-SMH00	35059-SMB	PLA835/0584-SMN00
709mm	>585mm	35071-SM	PLA835/0709-SMA00	35071-SMX	PLA835/0709-SMH00	35071-SMB	PLA835/0709-SMN00
834mm	>710mm	35084-SM	PLA835/0834-SMA00	35084-SMX	PLA835/0834-SMH00	35084-SMB	PLA835/0834-SMN00
959mm	>835mm	35096-SM	PLA835/0959-SMA00	35096-SMX	PLA835/0959-SMH00	35096-SMB	PLA835/0959-SMN00
1084mm	>960mm	35109-SM	PLA835/1084-SMA00	35109-SMX	PLA835/1084-SMH00	35109-SMB	PLA835/1084-SMN00
1209mm	>1085mm	35121-SM	PLA835/1209-SMA00	35121-SMX	PLA835/1209-SMH00	35121-SMB	PLA835/1209-SMN00
1334mm	>1210mm	35134-SM	PLA835/1334-SMA00	35134-SMX	PLA835/1334-SMH00	35134-SMB	PLA835/1334-SMN00
1459mm	>1335mm	35146-SM	PLA835/1459-SMA00	35146-SMX	PLA835/1459-SMH00	35146-SMB	PLA835/1459-SMN00
<6000mm per m	-	35600-SM	PLA835/6000-SMA00	35600-SMX	PLA835/6000-SMH00	35600-SMB	PLA835/6000-SMN00

Options

Detail	Item No.	Order code
Cut to fixed dimensions	900225	PLA900225
Version for sliding door	900908	PLA900908
Drop seal, top installation	900915	PLA900915
Silicon protrusion	900440	PLA900440
Bevel lip for uneven floors, DIN L (right-handed)	900893L	PLA900893L
Bevel lip for uneven floors, DIN R (left-handed)	900893R	PLA900893R
Profiles in special colours	900923	PLA900923


Planet KG-S Narrow

FACE-FIXED



48dB

A slimline, face-fixed automatic drop seal designed for glass, timber, metal, and PVC doors. Its ultra-narrow 11.5mm profile makes it ideal for minimalistic applications. Featuring a high-efficiency mechanism with a single-sided trigger, it enables parallel lowering and automatic compensation for sloping floors. Suitable for fire and smoke-shielding doors, with a seal height of up to 16mm. Designed for adhesive mounting. An optional bevel lip is available for uneven floors, accommodating gaps of up to 20mm.

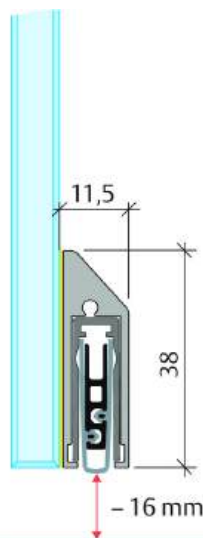

Planet KG-S Narrow Drop Seal



Planet KG-S Narrow



SYSTEM SPECIFICATIONS

Key benefits

- ▶ For new and existing doors.
- ▶ Unilateral and silent actuation.
- ▶ No scraping / trailing on the floor, thanks to parallel drop.
- ▶ High-quality silicone lip, lateral protrusion adjustable.
- ▶ Can be shortened to the next smaller stock length.

Characteristics

- ▶ Suitable for use on glass, timber, metal & PVC doors.
- ▶ Sound insulation up to 48dB.

Possible door types (depending on options)

- ▶ Single swing doors, double swing doors, sliding doors.

Profile size

- ▶ 11.5mm x 38mm.

Max drop height

- ▶ 16mm.

Profile material

- ▶ Aluminium.

Seal material

- ▶ **Planet KG-S narrow RD:** High-quality silicone.
- ▶ **Planet KG-S narrow FH+RD:** High-quality self-extinguishing silicone with aluminium carrier.
- ▶ Bevel lip available for uneven floors (Left-handed or right-handed variants).

Adjustment

- ▶ Self-levelling on uneven surfaces.
- ▶ Automatic compensation of sloped floors.
- ▶ Easy drop height adjustment.
- ▶ Door bottom can be adjusted without seal removal.

Drop height adjustment

- ▶ Using 3mm allen key.

Standard lengths

- ▶ 459mm, 584mm, 709mm, 834mm, 959mm, 1084mm, 1209mm, 1334mm, 1459mm.
- ▶ Note: Each length can be cut back by 125mm.
- ▶ Sizes up to 6m are available to special order.

Fixing

- ▶ Glued to the side with VHB adhesive tape or silicon or UV.

Accessories (supplied)

- ▶ Planet stopping plate, type 1 (stainless steel) and cover plate.

Finishes

- ▶ Silver anodised EV1 as standard.
- ▶ Matt anodised stainless steel (INOX) or black C35 matt anodised or special colours powder coated (RAL / DB / NCS) to special order.

Planet KG-S Set Narrow

HOW TO ORDER

Planet KG-S Set Narrow FH + RD

Length	Max cut back	SILVER ANODISED		MATT STAINLESS STEEL		BLACK	
		Item No.	Order code	Item No.	Order code	Item No.	Order code
400mm	-	35040-S	PLA835/0400-SA00	35040-SX	PLA835/0400-SH00	35040-SB	PLA835/0400-SN00
459mm	>335mm	35046-S	PLA835/0459-SA00	35046-SX	PLA835/0459-SH00	35046-SB	PLA835/0459-SN00
584mm	>460mm	35059-S	PLA835/0584-SA00	35059-SX	PLA835/0584-SH00	35059-SB	PLA835/0584-SN00
709mm	>585mm	35071-S	PLA835/0709-SA00	35071-SX	PLA835/0709-SH00	35071-SB	PLA835/0709-SN00
834mm	>710mm	35084-S	PLA835/0834-SA00	35084-SX	PLA835/0834-SH00	35084-SB	PLA835/0834-SN00
959mm	>835mm	35096-S	PLA835/0959-SA00	35096-SX	PLA835/0959-SH00	35096-SB	PLA835/0959-SN00
1084mm	>960mm	35109-S	PLA835/1084-SA00	35109-SX	PLA835/1084-SH00	35109-SB	PLA835/1084-SN00
1209mm	>1085mm	35121-S	PLA835/1209-SA00	35121-SX	PLA835/1209-SH00	35121-SB	PLA835/1209-SN00
1334mm	>1210mm	35134-S	PLA835/1334-SA00	35134-SX	PLA835/1334-SH00	35134-SB	PLA835/1334-SN00
1459mm	>1335mm	35146-S	PLA835/1459-SA00	35146-SX	PLA835/1459-SH00	35146-SB	PLA835/1459-SN00
<6000mm per m	-	35600-S	PLA835/6000-SA00	35600-SX	PLA835/6000-SH00	35600-SB	PLA835/6000-SN00

Options


Detail	Item No.	Order code
Cut to fixed dimensions	900225	PLA900225
Version for sliding door	900908	PLA900908
Drop seal, top installation	900915	PLA900915
Silicon protrusion	900440	PLA900440
Bevel lip for uneven floors, DIN L (right-handed)	900893L	PLA900893L
Bevel lip for uneven floors, DIN R (left-handed)	900893R	PLA900893R
Profiles in special colours	900923	PLA900923

Planet KG-A8 Narrow

FACE-FIXED


48dB

A slimline, face-fixed automatic drop seal designed for 8mm glass doors. Its narrow 12.9mm profile makes it ideal for minimalistic applications. Featuring a high-efficiency mechanism with a single-sided trigger, it enables parallel lowering and automatic compensation for sloping floors. Provides sound absorption of up to 48dB, with a drop height of up to 16mm. A durable silicone lip ensures reliable sealing. Designed for both adhesive and mechanical fixing. An optional bevel lip is available for uneven floors, accommodating gaps of up to 20mm.

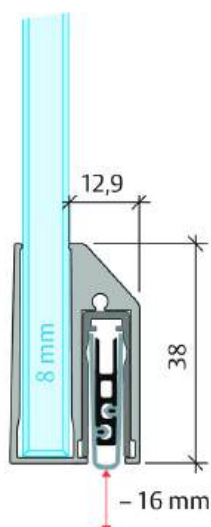

Planet KG-A8 Narrow Drop Seal



Planet KG-A8 Narrow



SYSTEM SPECIFICATIONS

Key benefits

- ▶ Elegant architectural design solution.
- ▶ For new and existing doors.
- ▶ Unilateral and silent actuation.
- ▶ No scraping / trailing on the floor, thanks to parallel drop.
- ▶ High-quality silicone lip, lateral protrusion adjustable.
- ▶ Can be shortened to the next smaller stock length.

Characteristics

- ▶ Suitable for single and double-leaf glass doors with 8mm glass thickness.
- ▶ Sound insulation up to 48dB.

Possible door types (depending on options)

- ▶ Single swing doors, double swing doors, sliding doors.

Profile size

- ▶ 11.5mm x 38mm.

Max drop height

- ▶ 16mm.

Profile material

- ▶ Aluminium.

Seal material

- ▶ **Planet KG-A8 FH+RD:** High-quality self-extinguishing silicone with aluminium carrier.
- ▶ Bevel lip available for uneven floors (Left-handed or right-handed variants).

Adjustment

- ▶ Self-levelling on uneven surfaces.
- ▶ Automatic compensation of sloped floors.
- ▶ Easy drop height adjustment.
- ▶ Door bottom can be adjusted without seal removal.

Drop height adjustment

- ▶ Using 3mm allen key.

Standard lengths

- ▶ 459mm, 584mm, 709mm, 834mm, 959mm, 1084mm, 1209mm, 1334mm, 1459mm.
- ▶ Note: Each length can be cut back by 125mm.
- ▶ Sizes up to 6m are available to special order.

Fixing

- ▶ Glued to the side with VHB adhesive tape (supplied) or silicone, or UV.

Accessories (supplied)

- ▶ Planet stopping plate, type 1 (stainless steel) and cover plate.

Finishes

- ▶ Silver anodised EV1 as standard.
- ▶ Matt anodised stainless steel (INOX) or special colours powder coated (RAL / DB / NCS) to special order.

Planet KG-A8 Narrow

HOW TO ORDER

Planet KG-A8 Narrow FH + RD

		SILVER ANODISED		MATT STAINLESS STEEL	
Length	Max cut back	Item No.	Order code	Item No.	Order code
400mm	-	35040-A8	PLA835/0400-A8A00	35040-A8X	PLA835/0400-A8H00
459mm	>335mm	35046-A8	PLA835/0459-A8A00	35046-A8X	PLA835/0459-A8H00
584mm	>460mm	35059-A8	PLA835/0584-A8A00	35059-A8X	PLA835A/0584-A8H00
709mm	>585mm	35071-A8	PLA835/0709-A8A00	35071-A8X	PLA835A/0709-A8H00
834mm	>710mm	35084-A8	PLA835/0834-A8A00	35084-A8X	PLA835A/0834-A8H00
959mm	>835mm	35096-A8	PLA835/0959-A8A00	35096-A8X	PLA835A/0959-A8H00
1084mm	>960mm	35109-A8	PLA835/1084-A8A00	35109-A8X	PLA835A/1084-A8H00
1209mm	>1085mm	35121-A8	PLA835/1209-A8A00	35121-A8X	PLA835A/1209-A8H00
1334mm	>1210mm	35134-A8	PLA835/1334-A8A00	35134-A8X	PLA835A/1334-A8H00
1459mm	>1335mm	35146-A8	PLA835/1459-A8A00	35146-A8X	PLA835A/1459-A8H00
<6000mm per m	-	35600-A8	PLA835/6000-A8A00	35600-A8X	PLA835A/6000-A8H00

Options


Detail	Item No.	Order code
Cut to fixed dimensions	900225	PLA900225
Version for sliding door	900908	PLA900908
Drop seal, top installation	900915	PLA900915
Silicon protrusion	900440	PLA900440
Bevel lip for uneven floors, DIN L (right-handed)	900893L	PLA900893L
Bevel lip for uneven floors, DIN R (left-handed)	900893R	PLA900893R
Profiles in special colours	900923	PLA900923

Planet KG-A10 Narrow

FACE-FIXED


48dB

A slimline, face-fixed automatic drop seal designed for 10mm glass doors. Its narrow 12.9mm profile makes it ideal for minimalistic applications. Featuring a high-efficiency mechanism with a single-sided trigger, it enables parallel lowering and automatic compensation for sloping floors. Provides sound absorption of up to 48dB, with a drop height of up to 16mm. A durable silicone lip ensures reliable sealing. Designed for both adhesive and mechanical fixing. An optional bevel lip is available for uneven floors, accommodating gaps of up to 20mm.

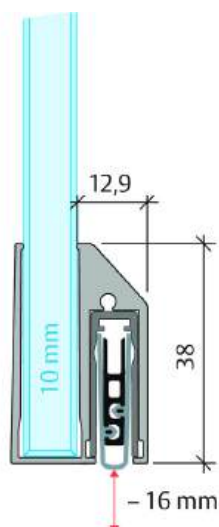

Planet KG-A10 Narrow



Planet KG-A10 Narrow Drop Seal

SYSTEM SPECIFICATIONS

Key benefits

- ▶ Elegant architectural design solution.
- ▶ For new and existing doors.
- ▶ Unilateral and silent actuation.
- ▶ No scraping / trailing on the floor, thanks to parallel drop.
- ▶ High-quality silicone lip, lateral protrusion adjustable.
- ▶ Can be shortened to the next smaller stock length.

Characteristics

- ▶ Suitable for single and double-leaf glass doors with 10mm glass thickness.
- ▶ Sound insulation up to 48dB.

Possible door types (depending on options)

- ▶ Single swing doors, double swing doors, sliding doors.

Profile size

- ▶ 11.5mm x 38mm.

Max drop height

- ▶ 16mm.

Profile material

- ▶ Aluminium.

Seal material

- ▶ **Planet KG-A10 RD:** High-quality silicone.
- ▶ **Planet KG-A10 FH+RD:** High-quality self-extinguishing silicone with aluminium carrier.
- ▶ Bevel lip available for uneven floors (Left-handed or right-handed variants).

Adjustment

- ▶ Self-levelling on uneven surfaces.
- ▶ Automatic compensation of sloped floors.
- ▶ Easy drop height adjustment.
- ▶ Door bottom can be adjusted without seal removal.

Drop height adjustment

- ▶ Using 3mm allen key.

Standard lengths

- ▶ 459mm, 584mm, 709mm, 834mm, 959mm, 1084mm, 1209mm, 1334mm, 1459mm.
- ▶ Note: Each length can be cut back by 125mm.
- ▶ Sizes up to 6m are available to special order.

Fixing

- ▶ Glued to the side with VHB adhesive tape (supplied) or silicone, or UV.

Accessories (supplied)

- ▶ Planet stopping plate, type 1 (stainless steel) and cover plate.

Finishes

- ▶ Silver anodised EV1 as standard.
- ▶ Matt anodised stainless steel (INOX) or special colours powder coated (RAL / DB / NCS) to special order.

Planet KG-A10 Narrow

HOW TO ORDER

Planet KG-A10 Narrow FH + RD

Length	Max cut back	SILVER ANODISED		MATT STAINLESS STEEL	
		Item No.	Order code	Item No.	Order code
400mm	-	35040-A10	PLA835/0400-A10A00	35040-A10X	PLA835/0400-A10H00
459mm	>335mm	35046-A10	PLA835/0459-A10A00	35046-A10X	PLA835/0459-A10H00
584mm	>460mm	35059-A10	PLA835/0584-A10A00	35059-A10X	PLA835/0584-A10H00
709mm	>585mm	35071-A10	PLA835/0709-A10A00	35071-A10X	PLA835/0709-A10H00
834mm	>710mm	35084-A10	PLA835/0834-A10A00	35084-A10X	PLA835/0834-A10H00
959mm	>835mm	35096-A10	PLA835/0959-A10A00	35096-A10X	PLA835/0959-A10H00
1084mm	>960mm	35109-A10	PLA835/1084-A10A00	35109-A10X	PLA835/1084-A10H00
1209mm	>1085mm	35121-A10	PLA835/1209-A10A00	35121-A10X	PLA835/1209-A10H00
1334mm	>1210mm	35134-A10	PLA835/1334-A10A00	35134-A10X	PLA835/1334-A10H00
1459mm	>1335mm	35146-A10	PLA835/1459-A10A00	35146-A10X	PLA835/1459-A10H00
<6000mm per m	-	35600-A10	PLA835/6000-A10A00	35600-A10X	PLA835/6000-A10H00

Options

Detail	Item No.	Order code
Cut to fixed dimensions	900225	PLA900225
Version for sliding door	900908	PLA900908
Drop seal, top installation	900915	PLA900915
Silicon protrusion	900440	PLA900440
Bevel lip for uneven floors, DIN L (right-handed)	900893L	PLA900893L
Bevel lip for uneven floors, DIN R (left-handed)	900893R	PLA900893R
Profiles in special colours	900923	PLA900923


Planet KG-A12 Narrow

FACE-FIXED



48dB

A slimline, face-fixed automatic drop seal designed for 12mm glass doors. Its narrow 12.9mm profile makes it ideal for minimalistic applications. Featuring a high-efficiency mechanism with a single-sided trigger, it enables parallel lowering and automatic compensation for sloping floors. Provides sound absorption of up to 48dB, with a drop height of up to 16mm. A durable silicone lip ensures reliable sealing. Designed for both adhesive and mechanical fixing. An optional bevel lip is available for uneven floors, accommodating gaps of up to 20mm.

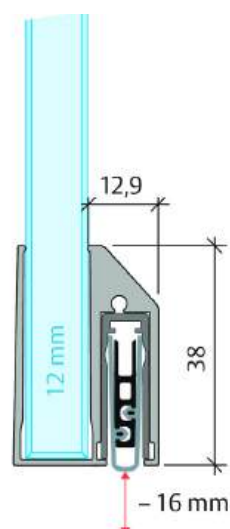

Planet KG-A12 Narrow Drop Seal



Planet KG-A12 Narrow



SYSTEM SPECIFICATIONS

Key benefits

- ▶ Elegant architectural design solution.
- ▶ For new and existing doors.
- ▶ Unilateral and silent actuation.
- ▶ No scraping / trailing on the floor, thanks to parallel drop.
- ▶ High-quality silicone lip, lateral protrusion adjustable.
- ▶ Can be shortened to the next smaller stock length.

Characteristics

- ▶ Suitable for single and double-leaf glass doors with 12mm glass thickness.
- ▶ Sound insulation up to 48dB.

Possible door types (depending on options)

- ▶ Single swing doors, double swing doors, sliding doors.

Profile size

- ▶ 11.5mm x 38mm.

Max drop height

- ▶ 16mm.

Profile material

- ▶ Aluminium.

Seal material

- ▶ **Planet KG-A12 RD:** High-quality silicone.
- ▶ **Planet KG-A12 FH+RD:** High-quality self-extinguishing silicone with aluminium carrier.
- ▶ Bevel lip available for uneven floors (Left-handed or right-handed variants).

Adjustment

- ▶ Self-levelling on uneven surfaces.
- ▶ Automatic compensation of sloped floors.
- ▶ Easy drop height adjustment.
- ▶ Door bottom can be adjusted without seal removal.

Drop height adjustment

- ▶ Using 3mm allen key.

Standard lengths

- ▶ 459mm, 584mm, 709mm, 834mm, 959mm, 1084mm, 1209mm, 1334mm, 1459mm.
- ▶ Note: Each length can be cut back by 125mm.
- ▶ Sizes up to 6m are available to special order.

Fixing

- ▶ Glued to the side with VHB adhesive tape (supplied) or silicone, or UV.

Accessories (supplied)

- ▶ Planet stopping plate, type 1 (stainless steel) and cover plate.

Finishes

- ▶ Silver anodised EV1 as standard.
- ▶ Matt anodised stainless steel (INOX) or special colours powder coated (RAL / DB / NCS) to special order.

Planet KG-A12 Narrow

HOW TO ORDER

Planet KG-A10 Narrow FH + RD

Length	Max cut back	SILVER ANODISED		MATT STAINLESS STEEL	
		Item No.	Order code	Item No.	Order code
400mm	-	35040-A12	PLA835/0400-A12A00	35040-A12X	PLA835/0400-A12H00
459mm	>335mm	35046-A12	PLA835/0459-A12A00	35046-A12X	PLA835/0459-A12H00
584mm	>460mm	35059-A12	PLA835/0584-A12A00	35059-A12X	PLA835/0584-A12H00
709mm	>585mm	35071-A12	PLA835/0709-A12A00	35071-A12X	PLA835/0709-A12H00
834mm	>710mm	35084-A12	PLA835/0834-A12A00	35084-A12X	PLA835/0834-A12H00
959mm	>835mm	35096-A12	PLA835/0959-A12A00	35096-A12X	PLA835/0959-A12H00
1084mm	>960mm	35109-A12	PLA835/1084-A12A00	35109-A12X	PLA835/1084-A12H00
1209mm	>1085mm	35121-A12	PLA835/1209-A12A00	35121-A12X	PLA835/1209-A12H00
1334mm	>1210mm	35134-A12	PLA835/1334-A12A00	35134-A12X	PLA835/1334-A12H00
1459mm	>1335mm	35146-A12	PLA835/1459-A12A00	35146-A12X	PLA835/1459-A12H00
<6000mm per m	-	35600-A12	PLA835/6000-A12A00	35600-A12X	PLA835/6000-A12H00

Options

Detail	Item No.	Order code
Cut to fixed dimensions	900225	PLA900225
Version for sliding door	900908	PLA900908
Drop seal, top installation	900915	PLA900915
Silicon protrusion	900440	PLA900440
Bevel lip for uneven floors, DIN L (right-handed)	900893L	PLA900893L
Bevel lip for uneven floors, DIN R (left-handed)	900893R	PLA900893R
Profiles in special colours	900923	PLA900923


Planet KG-F8 Narrow

FACE-FIXED



48dB

A slimline, face-fixed automatic drop seal designed to be mounted beneath 8mm glass doors. Featuring a high-efficiency mechanism with a single-sided trigger, it enables parallel lowering and automatic compensation for sloping floors. Provides sound absorption of up to 48dB, with a drop height of up to 16mm. A durable silicone lip ensures reliable sealing. An optional bevel lip is available for uneven floors, accommodating gaps of up to 20mm.

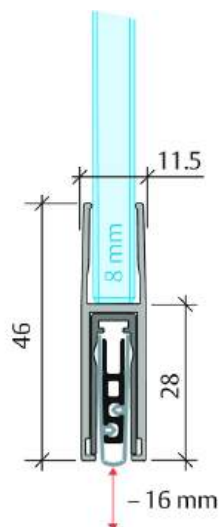

Planet KG-F8 Narrow Drop Seal



Planet KG-F8 Narrow



SYSTEM SPECIFICATIONS

Key benefits

- ▶ Elegant architectural design solution.
- ▶ For new and existing doors.
- ▶ Unilateral and silent actuation.
- ▶ No scraping / trailing on the floor, thanks to parallel drop.
- ▶ High-quality silicone lip, lateral protrusion adjustable.
- ▶ Can be shortened to the next smaller stock length.

Characteristics

- ▶ Suitable for single and double-leaf glass doors with 8mm glass thickness.
- ▶ Sound insulation up to 48dB.

Possible door types (depending on options)

- ▶ Single swing doors, double swing doors, sliding doors.

Profile size

- ▶ 11.5mm x 46mm.

Max drop height

- ▶ 16mm.

Profile material

- ▶ Aluminium.

Seal material

- ▶ **Planet KG-F8 RD:** High-quality silicone.
- ▶ **Planet KG-F8 FH+RD:** High-quality self-extinguishing silicone with aluminium carrier.
- ▶ Bevel lip available for uneven floors (Left-handed or right-handed variants).

Adjustment

- ▶ Self-levelling on uneven surfaces.
- ▶ Automatic compensation of sloped floors.
- ▶ Easy drop height adjustment.
- ▶ Door bottom can be adjusted without seal removal.

Drop height adjustment

- ▶ Using 3mm allen key.

Standard lengths

- ▶ 459mm, 584mm, 709mm, 834mm, 959mm, 1084mm, 1209mm, 1334mm, 1459mm.
- ▶ Note: Each length can be cut back by 125mm.
- ▶ Sizes up to 6m are available to special order.

Fixing

- ▶ Glued underneath with VHB adhesive tape or silicone, or UV.

Accessories (supplied)

- ▶ Planet stopping plate, type 1 (stainless steel) and cover plate.

Finishes

- ▶ Silver anodised EV1 as standard.
- ▶ Matt anodised stainless steel (INOX) or special colours powder coated (RAL / DB / NCS) to special order.

Planet KG-F8 Narrow

HOW TO ORDER

Planet KG-F8 Narrow RD

		SILVER ANODISED		MATT STAINLESS STEEL	
Length	Max cut back	Item No.	Order code	Item No.	Order code
400mm	-	38040-F8S	PLA838/0400-F8A00	38040-F8SX	PLA838/0400-F8H00
459mm	>335mm	38046-F8S	PLA838/0459-F8A00	38046-F8SX	PLA838/0459-F8H00
584mm	>460mm	38059-F8S	PLA838/0584-F8A00	38059-F8SX	PLA838/0584-F8H00
709mm	>585mm	38071-F8S	PLA838/0709-F8A00	38071-F8SX	PLA838/0709-F8H00
834mm	>710mm	38084-F8S	PLA838/0834-F8A00	38084-F8SX	PLA838/0834-F8H00
959mm	>835mm	38096-F8S	PLA838/0959-F8A00	38096-F8SX	PLA838/0959-F8H00
1084mm	>960mm	38109-F8S	PLA838/1084-F8A00	38109-F8SX	PLA838/1084-F8H00
1209mm	>1085mm	38121-F8S	PLA838/1209-F8A00	38121-F8SX	PLA838/1209-F8H00
1334mm	>1210mm	38134-F8S	PLA838/1334-F8A00	38134-F8SX	PLA838/1334-F8H00
1459mm	>1335mm	38146-F8S	PLA838/1459-F8A00	38146-F8SX	PLA838/1459-F8H00
<6000mm per m	-	38600-F8S	PLA838/6000-F8A00	38600-F8SX	PLA838/6000-F8H00

Planet KG-F8 Narrow FH+RD

		SILVER ANODISED		MATT STAINLESS STEEL	
Length	Max cut back	Item No.	Order code	Item No.	Order code
400mm	-	39040-F8S	PLA839/0400-F8A00	39040-F8SX	PLA839/0400-F8H00
459mm	>335mm	39046-F8S	PLA839/0459-F8A00	39046-F8SX	PLA839/0459-F8H00
584mm	>460mm	39059-F8S	PLA839/0584-F8A00	39059-F8SX	PLA839/0584-F8H00
709mm	>585mm	39071-F8S	PLA839/0709-F8A00	39071-F8SX	PLA839/0709-F8H00
834mm	>710mm	39084-F8S	PLA839/0834-F8A00	39084-F8SX	PLA839/0834-F8H00
959mm	>835mm	39096-F8S	PLA839/0959-F8A00	39096-F8SX	PLA839/0959-F8H00
1084mm	>960mm	39109-F8S	PLA839/1084-F8A00	39109-F8SX	PLA839/1084-F8H00
1209mm	>1085mm	39121-F8S	PLA839/1209-F8A00	39121-F8SX	PLA839/1209-F8H00
1334mm	>1210mm	39134-F8S	PLA839/1334-F8A00	39134-F8SX	PLA839/1334-F8H00
1459mm	>1335mm	39146-F8S	PLA839/1459-F8A00	39146-F8SX	PLA839/1459-F8H00
<6000mm per m	-	39600-F8S	PLA839/6000-F8A00	39600-F8SX	PLA839/6000-F8H00

Options

Detail	Item No.	Order code	Detail	Item No.	Order code
Cut to fixed dimensions	900225	PLA900225	Bevel lip for uneven floors, DIN L (right-handed)	900893L	PLA900893L
Version for sliding door	900908	PLA900908			
Drop seal, top installation	900915	PLA900915	Bevel lip for uneven floors, DIN R (left-handed)	900893R	PLA900893R
Folding walls G-G design	900918	PLA900918			
Silicon protrusion	900440	PLA900440	Profiles in special colours	900923	PLA900923


Planet KG-F10 Narrow

FACE-FIXED



48dB

A slimline, face-fixed automatic drop seal designed to be mounted beneath 10mm glass doors. Featuring a high-efficiency mechanism with a single-sided trigger, it enables parallel lowering and automatic compensation for sloping floors. Provides sound absorption of up to 48dB, with a drop height of up to 16mm. A durable silicone lip ensures reliable sealing. An optional bevel lip is available for uneven floors, accommodating gaps of up to 20mm.

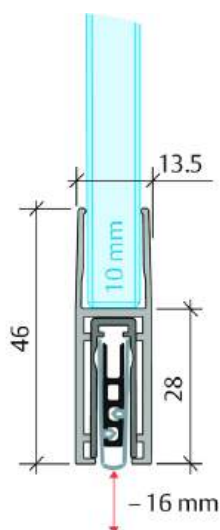

Planet KG-F10 Narrow

Planet KG-F10 Drop Seal



SYSTEM SPECIFICATIONS

Key benefits

- ▶ Elegant architectural design solution.
- ▶ For new and existing doors.
- ▶ Unilateral and silent actuation.
- ▶ No scraping / trailing on the floor, thanks to parallel drop.
- ▶ High-quality silicone lip, lateral protrusion adjustable.
- ▶ Can be shortened to the next smaller stock length.

Characteristics

- ▶ Suitable for single and double-leaf all-glass doors with 10mm glass thickness or laminated safety glass.
- ▶ Sound insulation up to 48dB.

Possible door types (depending on options)

- ▶ Single swing doors, double swing doors, sliding doors.

Profile size

- ▶ 13.5mm x 46mm.

Max drop height

- ▶ 16mm.

Profile material

- ▶ Aluminium.

Seal material

- ▶ **Planet KG-F10 RD:** High-quality silicone.
- ▶ **Planet KG-F10 FH+RD:** High-quality self-extinguishing silicone with aluminium carrier.
- ▶ Bevel lip available for uneven floors (Left-handed or right-handed variants).

Adjustment

- ▶ Self-levelling on uneven surfaces.
- ▶ Automatic compensation of sloped floors.
- ▶ Easy drop height adjustment.
- ▶ Door bottom can be adjusted without seal removal.

Drop height adjustment

- ▶ Using 3mm allen key.

Standard lengths

- ▶ 459mm, 584mm, 709mm, 834mm, 959mm, 1084mm, 1209mm, 1334mm, 1459mm.
- ▶ Note: Each length can be cut back by 125mm.
- ▶ Sizes up to 6m are available to special order.

Fixing

- ▶ Glued underneath with VHB adhesive tape or silicone, or UV.

Accessories (supplied)

- ▶ Planet stopping plate, type 1 (stainless steel) and cover plate.

Finishes

- ▶ Silver anodised EV1 as standard.
- ▶ Matt anodised stainless steel (INOX) or special colours powder coated (RAL / DB / NCS) to special order.

Planet KG-F10 Narrow

HOW TO ORDER

Planet KG-F10 Narrow RD

		SILVER ANODISED		MATT STAINLESS STEEL	
Length	Max cut back	Item No.	Order code	Item No.	Order code
400mm	-	38040-F10S	PLA838/0400-F10A00	38040-F10SX	PLA838/0400-F10H00
459mm	>335mm	38046-F10S	PLA838/0459-F10A00	38046-F10SX	PLA838/0459-F10H00
584mm	>460mm	38059-F10S	PLA838/0584-F10A00	38059-F10SX	PLA838/0584-F10H00
709mm	>585mm	38071-F10S	PLA838/0709-F10A00	38071-F10SX	PLA838/0709-F10H00
834mm	>710mm	38084-F10S	PLA838/0834-F10A00	38084-F10SX	PLA838/0834-F10H00
959mm	>835mm	38096-F10S	PLA838/0959-F10A00	38096-F10SX	PLA838/0959-F10H00
1084mm	>960mm	38109-F10S	PLA838/1084-F10A00	38109-F10SX	PLA838/1084-F10H00
1209mm	>1085mm	38121-F10S	PLA838/1209-F10A00	38121-F10SX	PLA838/1209-F10H00
1334mm	>1210mm	38134-F10S	PLA838/1334-F10A00	38134-F10SX	PLA838/1334-F10H00
1459mm	>1335mm	38146-F10S	PLA838/1459-F10A00	38146-F10SX	PLA838/1459-F10H00
<6000mm per m	-	38600-F10S	PLA838/6000-F10A00	38600-F10SX	PLA838/6000-F10H00

Planet KG-F10 Narrow FH+RD

		SILVER ANODISED		MATT STAINLESS STEEL	
Length	Max cut back	Item No.	Order code	Item No.	Order code
400mm	-	39040-F10S	PLA839/0400-F10A00	39040-F10SX	PLA839/0400-F10H00
459mm	>335mm	39046-F10S	PLA839/0459-F10A00	39046-F10SX	PLA839/0459-F10H00
584mm	>460mm	39059-F10S	PLA839/0584-F10A00	39059-F10SX	PLA839/0584-F10H00
709mm	>585mm	39071-F10S	PLA839/0709-F10A00	39071-F10SX	PLA839/0709-F10H00
834mm	>710mm	39084-F10S	PLA839/0834-F10A00	39084-F10SX	PLA839/0834-F10H00
959mm	>835mm	39096-F10S	PLA839/0959-F10A00	39096-F10SX	PLA839/0959-F10H00
1084mm	>960mm	39109-F10S	PLA839/1084-F10A00	39109-F10SX	PLA839/1084-F10H00
1209mm	>1085mm	39121-F10S	PLA839/1209-F10A00	39121-F10SX	PLA839/1209-F10H00
1334mm	>1210mm	39134-F10S	PLA839/1334-F10A00	39134-F10SX	PLA839/1334-F10H00
1459mm	>1335mm	39146-F10S	PLA839/1459-F10A00	39146-F10SX	PLA839/1459-F10H00
<6000mm per m	-	39600-F10S	PLA839/6000-F10A00	39600-F10SX	PLA839/6000-F10H00

Options

Detail	Item No.	Order code	Detail	Item No.	Order code
Cut to fixed dimensions	900225	PLA900225	Bevel lip for uneven floors, DIN L (right-handed)	900893L	PLA900893L
Version for sliding door	900908	PLA900908			
Drop seal, top installation	900915	PLA900915	Bevel lip for uneven floors, DIN R (left-handed)	900893R	PLA900893R
Folding walls G-G design	900918	PLA900918			
Silicon protrusion	900440	PLA900440	Profiles in special colours	900923	PLA900923


Planet KG-F12s

FACE-FIXED



48dB

A slimline, face-fixed automatic drop seal designed to be mounted beneath 12mm glass doors. Featuring a high-efficiency mechanism with a single-sided trigger, it enables parallel lowering and automatic compensation for sloping floors. Provides sound absorption of up to 48dB, with a drop height of up to 16mm. A durable silicone lip ensures reliable sealing. An optional bevel lip is available for uneven floors, accommodating gaps of up to 20mm.

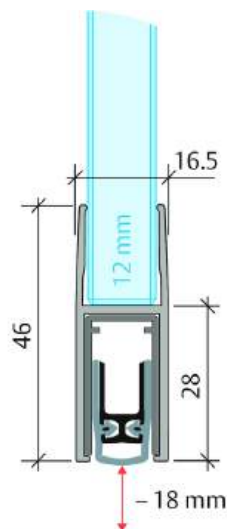

Planet KG-F12s Narrow

Planet KG-F12s Narrow Drop Seal



SYSTEM SPECIFICATIONS

Key benefits

- ▶ Elegant architectural design solution.
- ▶ For new and existing doors.
- ▶ Unilateral and silent actuation.
- ▶ No scraping / trailing on the floor, thanks to parallel drop.
- ▶ High-quality silicone lip, lateral protrusion adjustable.
- ▶ Can be shortened to the next smaller stock length.

Characteristics

- ▶ Suitable for single and double-leaf all-glass doors with 12mm glass thickness or laminated safety glass.
- ▶ Sound insulation up to 48dB.

Possible door types (depending on options)

- ▶ Single swing doors, double swing doors, sliding doors.

Profile size

- ▶ 16.5mm x 46mm.

Max drop height

- ▶ 16mm.

Profile material

- ▶ Aluminium.

Seal material

- ▶ **Planet KG-F12 RD:** High-quality silicone.
- ▶ **Planet KG-F12 FH+RD:** High-quality self-extinguishing silicone with aluminium carrier.
- ▶ Bevel lip available for uneven floors (Left-handed or right-handed variants).

Adjustment

- ▶ Self-levelling on uneven surfaces.
- ▶ Automatic compensation of sloped floors.
- ▶ Easy drop height adjustment.
- ▶ Door bottom can be adjusted without seal removal.

Drop height adjustment

- ▶ Using 3mm allen key.

Standard lengths

- ▶ 459mm, 584mm, 709mm, 834mm, 959mm, 1084mm, 1209mm, 1334mm, 1459mm.
- ▶ Note: Each length can be cut back by 125mm.
- ▶ Sizes up to 6m are available to special order.

Fixing

- ▶ Glued underneath with VHB adhesive tape or silicone, or UV.

Accessories (supplied)

- ▶ Planet stopping plate, type 1 (stainless steel) and cover plate.

Finishes

- ▶ Silver anodised EV1 as standard.
- ▶ Matt anodised stainless steel (INOX) or special colours powder coated (RAL / DB / NCS) to special order.

Planet KG-F12s

HOW TO ORDER

Planet KG-F12s RD

		SILVER ANODISED		MATT STAINLESS STEEL	
Length	Max cut back	Item No.	Order code	Item No.	Order code
400mm	-	38040-F12S	PLA838/0400-F12SA00	38040-F12SX	PLA838/0400-F12SH00
459mm	>335mm	38046-F12S	PLA838/0459-F12SA00	38046-F12SX	PLA838/0459-F12SH00
584mm	>460mm	38059-F12S	PLA838/0584-F12SA00	38059-F12SX	PLA838/0584-F12SH00
709mm	>585mm	38071-F12S	PLA838/0709-F12SA00	38071-F12SX	PLA838/0709-F12SH00
834mm	>710mm	38084-F12S	PLA838/0834-F12SA00	38084-F12SX	PLA838/0834-F12SH00
959mm	>835mm	38096-F12S	PLA838/0959-F12SA00	38096-F12SX	PLA838/0959-F12SH00
1084mm	>960mm	38109-F12S	PLA838/1084-F12SA00	38109-F12SX	PLA838/1084-F12SH00
1209mm	>1085mm	38121-F12S	PLA838/1209-F12SA00	38121-F12SX	PLA838/1209-F12SH00
1334mm	>1210mm	38134-F12S	PLA838/1334-F12SA00	38134-F12SX	PLA838/1334-F12SH00
1459mm	>1335mm	38146-F12S	PLA838/1459-F12SA00	38146-F12SX	PLA838/1459-F12SH00
<6000mm per m	-	38600-F12S	PLA838/6000-F12SA00	38600-F12SX	PLA838/6000-F12SH00

Planet KG-F12s FH+RD

		SILVER ANODISED		MATT STAINLESS STEEL	
Length	Max cut back	Item No.	Order code	Item No.	Order code
400mm	-	39040-F12S	PLA839/0400-F12SA00	39040-F12SX	PLA839/0400-F12SH00
459mm	>335mm	39046-F12S	PLA839/0459-F12SA00	39046-F12SX	PLA839/0459-F12SH00
584mm	>460mm	39059-F12S	PLA839/0584-F12SA00	39059-F12SX	PLA839/0584-F12SH00
709mm	>585mm	39071-F12S	PLA839/0709-F12SA00	39071-F12SX	PLA839/0709-F12SH00
834mm	>710mm	39084-F12S	PLA839/0834-F12SA00	39084-F12SX	PLA839/0834-F12SH00
959mm	>835mm	39096-F12S	PLA839/0959-F12SA00	39096-F12SX	PLA839/0959-F12SH00
1084mm	>960mm	39109-F12S	PLA839/1084-F12SA00	39109-F12SX	PLA839/1084-F12SH00
1209mm	>1085mm	39121-F12S	PLA839/1209-F12SA00	39121-F12SX	PLA839/1209-F12SH00
1334mm	>1210mm	39134-F12S	PLA839/1334-F12SA00	39134-F12SX	PLA839/1334-F12SH00
1459mm	>1335mm	39146-F12S	PLA839/1459-F12SA00	39146-F12SX	PLA839/1459-F12SH00
<6000mm per m	-	39600-F12S	PLA839/6000-F12SA00	39600-F12SX	PLA839/6000-F12SH00

Options

Detail	Item No.	Order code	Detail	Item No.	Order code
Cut to fixed dimensions	900225	PLA900225	Bevel lip for uneven floors, DIN L (right-handed)	900894L	PLA900894L
Version for sliding door	900908	PLA900908	Bevel lip for uneven floors, DIN R (left-handed)	900894R	PLA900894R
Drop seal, top installation	900915	PLA900915	Profiles in special colours	900923	PLA900923
Folding walls G-G design	900918	PLA900918	Reinforced mechanics	900783	PLA900783
Silicon protrusion	900440	PLA900440			


Planet KG-U

FACE-FIXED



48dB

A face-fixed automatic drop seal designed to be mounted beneath glass doors 12mm or thicker. Featuring a high-efficiency mechanism with a single-sided trigger, it enables parallel lowering and automatic compensation for sloping floors. Provides sound absorption of up to 48dB, with a drop height of up to 18mm. A durable silicone lip ensures reliable sealing. An optional bevel lip is available for uneven floors, accommodating gaps of up to 22mm.

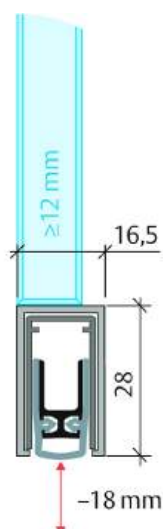

Planet KG-U

Planet KG-U Drop Seal



SYSTEM SPECIFICATIONS

Key benefits

- ▶ Unilateral and silent actuation.
- ▶ No scraping / trailing on the floor, thanks to parallel drop.
- ▶ High-quality silicone lip, lateral protrusion adjustable.
- ▶ Can be shortened to the next smaller stock length.

Characteristics

- ▶ Suitable for single-leaf and double-leaf all-glass doors from 12mm glass thickness.
- ▶ Sound insulation up to 48dB.

Possible door types (depending on options)

- ▶ Single swing doors, double swing doors, sliding doors, folding doors.

Profile size

- ▶ 16.5mm x 28mm.

Max drop height

- ▶ 18mm.

Profile material

- ▶ Aluminium.

Seal material

- ▶ **Planet KG-U RD:** High-quality silicone.
- ▶ **Planet KG-U FH+RD:** High-quality self-extinguishing silicone with aluminium carrier.
- ▶ Bevel lip available for uneven floors (Left-handed or right-handed variants).

Adjustment

- ▶ Self-levelling on uneven surfaces.
- ▶ Automatic compensation of sloped floors.
- ▶ Easy drop height adjustment.
- ▶ Door bottom can be adjusted without seal removal.

Drop height adjustment

- ▶ Using 3mm allen key.

Standard lengths

- ▶ 459mm, 584mm, 709mm, 834mm, 959mm, 1084mm, 1209mm, 1334mm, 1459mm.
- ▶ Note: Each length can be cut back by 125mm.
- ▶ Sizes up to 6m are available to special order.

Fixing

- ▶ Glued underneath with VHB adhesive tape or silicone, or UV.

Accessories (supplied)

- ▶ Planet stopping plate, type 1 (stainless steel) and cover plate.

Finishes

- ▶ Silver anodised EV1 as standard.
- ▶ Matt anodised stainless steel (INOX) or special colours powder coated (RAL / DB / NCS) to special order.

Planet KG-U

HOW TO ORDER

Planet KG-U RD

Length	Max cut back	SILVER ANODISED		MATT STAINLESS STEEL	
		Item No.	Order code	Item No.	Order code
400mm	-	38040-U	PLA838/0400-UA00	38040-UX	PLA838/0400-UH00
459mm	>335mm	38046-U	PLA838/0459-UA00	38046-UX	PLA838/0459-UH00
584mm	>460mm	38059-U	PLA838/0584-UA00	38059-UX	PLA838/0584-UH00
709mm	>585mm	38071-U	PLA838/0709-UA00	38071-UX	PLA838/0709-UH00
834mm	>710mm	38084-U	PLA838/0834-UA00	38084-UX	PLA838/0834-UH00
959mm	>835mm	38096-U	PLA838/0959-UA00	38096-UX	PLA838/0959-UH00
1084mm	>960mm	38109-U	PLA838/1084-UA00	38109-UX	PLA838/1084-UH00
1209mm	>1085mm	38121-U	PLA838/1209-UA00	38121-UX	PLA838/1209-UH00
1334mm	>1210mm	38134-U	PLA838/1334-UA00	38134-UX	PLA838/1334-UH00
1459mm	>1335mm	38146-U	PLA838/1459-UA00	38146-UX	PLA838/1459-UH00
<6000mm per m	-	38600-U	PLA838/6000-UA00	38600-UX	PLA838/6000-UH00

Planet KG-U FH+RD

Length	Max cut back	SILVER ANODISED		MATT STAINLESS STEEL	
		Item No.	Order code	Item No.	Order code
400mm	-	39040-U	PLA839/0400-UA00	39040-UX	PLA839/0400-UH00
459mm	>335mm	39046-U	PLA839/0459-UA00	39046-UX	PLA839/0459-UH00
584mm	>460mm	39059-U	PLA839/0584-UA00	39059-UX	PLA839/0584-UH00
709mm	>585mm	39071-U	PLA839/0709-UA00	39071-UX	PLA839/0709-UH00
834mm	>710mm	39084-U	PLA839/0834-UA00	39084-UX	PLA839/0834-UH00
959mm	>835mm	39096-U	PLA839/0959-UA00	39096-UX	PLA839/0959-UH00
1084mm	>960mm	39109-U	PLA839/1084-UA00	39109-UX	PLA839/1084-UH00
1209mm	>1085mm	39121-U	PLA839/1209-UA00	39121-UX	PLA839/1209-UH00
1334mm	>1210mm	39134-U	PLA839/1334-UA00	39134-UX	PLA839/1334-UH00
1459mm	>1335mm	39146-U	PLA839/1459-UA00	39146-UX	PLA839/1459-UH00
<6000mm per m	-	39600-U	PLA839/6000-UA00	39600-UX	PLA839/6000-UH00

Options

Detail	Item No.	Order code	Detail	Item No.	Order code
Cut to fixed dimensions	900225	PLA900225	Bevel lip for uneven floors, DIN L (right-handed)	900894L	PLA900894L
Version for sliding door	900908	PLA900908	Bevel lip for uneven floors, DIN R (left-handed)	900894R	PLA900894R
Drop seal, top installation	900915	PLA900915	Profiles in special colours	900923	PLA900923
Folding walls G-G design	900918	PLA900918			
Reinforced mechanics	900783	PLA900783			


Planet KG-SL10

FACE-FIXED


44dB

An automatic drop seal designed for 10mm glass sliding doors. Featuring a high-efficiency mechanism with a single-sided trigger, it enables parallel lowering and automatic compensation for sloping floors. Provides sound absorption of up to 44dB, with a drop height of up to 18mm. A durable silicone lip ensures reliable sealing. An optional bevel lip is available for uneven floors, accommodating gaps of up to 22mm.

DROP SEALS - GLASS DOORS

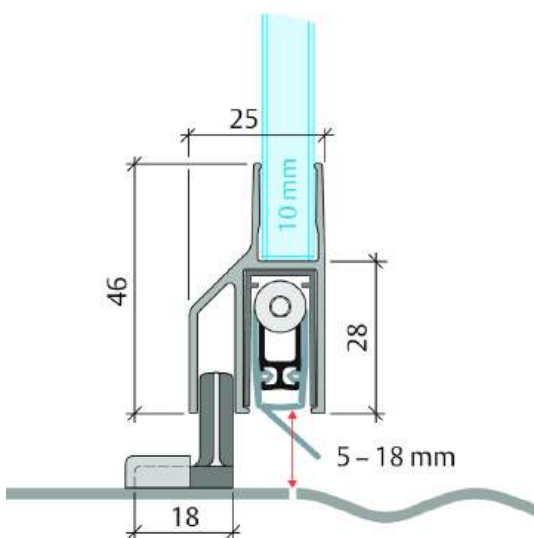

Planet KG-SL10



Planet KG-SL10



SYSTEM SPECIFICATIONS

Key benefits

- ▶ Unilateral and silent actuation.
- ▶ No scraping / trailing on the floor, thanks to parallel drop.
- ▶ High-quality silicone lip, lateral protrusion adjustable.
- ▶ Plan in door locking mechanism (hook latch or roller retainer).
- ▶ Can be shortened to the next smaller stock length.

Characteristics

- ▶ Air flow 30 m³/h at ventilation length 1050 mm and pressure difference of 3.9 Pa.
- ▶ Suitable for single and double-leaf sliding glass doors with 10mm glass thicknesses.
- ▶ Sound insulation up to 44dB.

Possible door types (depending on options)

- ▶ Single and double-leaf sliding glass doors.

Profile size

- ▶ 25mm x 46mm.

Max drop height

- ▶ 5mm - 18mm.

Profile material

- ▶ Aluminium.

Seal material

- ▶ **Planet KG-SL10 RD:** High-quality silicone.
- ▶ **Planet KG-SL10 FH+RD:** High-quality self-extinguishing silicone with aluminium carrier.
- ▶ Bevel lip available for uneven floors (Left-handed or right-handed variants).

Adjustment

- ▶ Self-levelling on uneven surfaces.
- ▶ Automatic compensation of sloped floors.
- ▶ Easy drop height adjustment.
- ▶ Door bottom can be adjusted without seal removal.

Drop height adjustment

- ▶ Using 3mm allen key.

Standard lengths

- ▶ 459mm, 584mm, 709mm, 834mm, 959mm, 1084mm, 1209mm, 1334mm, 1459mm.
- ▶ Note: Each length can be cut back by 125mm.
- ▶ Sizes up to 6m are available to special order.

Fixing

- ▶ Glued underneath with VHB adhesive tape or silicone, or UV.

Accessories (supplied)

- ▶ Planet stopping plate, type 1 (stainless steel) and cover plate.

Finishes

- ▶ Silver anodised EV1 as standard.
- ▶ Matt anodised stainless steel (INOX) or special colours powder coated (RAL / DB / NCS) to special order.

Planet KG-SL10

HOW TO ORDER

Planet KG-SL10 RD

		SILVER ANODISED			
		DIN L		DIN R	
Length	Max cut back	Item No.	Order code	Item No.	Order code
459mm	>335mm	37046-SL10L	PLA837/0459-SLLA00	37046-SL10R	PLA837/0459-SLRA00
584mm	>460mm	37059-SL10L	PLA837/0584-SLLA00	37059-SL10R	PLA837/0584-SLRA00
709mm	>585mm	37071-SL10L	PLA837/0709-SLLA00	37071-SL10R	PLA837/0709-SLRA00
834mm	>710mm	37084-SL10L	PLA837/0834-SLLA00	37084-SL10R	PLA837/0834-SLRA00
959mm	>835mm	37096-SL10L	PLA837/0959-SLLA00	37096-SL10R	PLA837/0959-SLRA00
1084mm	>960mm	37109-SL10L	PLA837/1084-SLLA00	37109-SL10R	PLA837/1084-SLRA00
1209mm	>1085mm	37121-SL10L	PLA837/1209-SLLA00	37121-SL10R	PLA837/1209-SLRA00
1334mm	>1210mm	37134-SL10L	PLA837/1334-SLLA00	37134-SL10R	PLA837/1334-SLRA00
1459mm	>1335mm	37146-SL10L	PLA837/1459-SLLA00	37146-SL10R	PLA837/1459-SLRA00
<6000mm per m	-	37160-SL10L	PLA837/6000-SLLA00	37160-SL10R	PLA837/6000-SLRA00

Planet KG-SL10 RD

		MATT STAINLESS STEEL			
		DIN L		DIN R	
Length	Max cut back	Item No.	Order code	Item No.	Order code
459mm	>335mm	37046-SL10XL	PLA837/0459-SLLH00	37046-SL10XR	PLA837/0459-SLRH00
584mm	>460mm	37059-SL10XL	PLA837/0584-SLLH00	37059-SL10XR	PLA837/0584-SLRH00
709mm	>585mm	37071-SL10XL	PLA837/0709-SLLH00	37071-SL10XR	PLA837/0709-SLRH00
834mm	>710mm	37084-SL10XL	PLA837/0834-SLLH00	37084-SL10XR	PLA837/0834-SLRH00
959mm	>835mm	37096-SL10XL	PLA837/0959-SLLH00	37096-SL10XR	PLA837/0959-SLRH00
1084mm	>960mm	37109-SL10XL	PLA837/1084-SLLH00	37109-SL10XR	PLA837/1084-SLRH00
1209mm	>1085mm	37121-SL10XL	PLA837/1209-SLLH00	37121-SL10XR	PLA837/1209-SLRH00
1334mm	>1210mm	37134-SL10XL	PLA837/1334-SLLH00	37134-SL10XR	PLA837/1334-SLRH00
1459mm	>1335mm	37146-SL10XL	PLA837/1459-SLLH00	37146-SL10XR	PLA837/1459-SLRH00
<6000mm per m	-	37600-SL10XL	PLA837/6000-SLLH00	37600-SL10XR	PLA837/6000-SLRH00

Options

Detail	Item No.	Order code
Cut to fixed dimensions	900225	PLA900225
Silicon protrusion	900440	PLA900440
Reinforced mechanics	900783	PLA900783
Round lip design	900910	PLA900910
Profiles in special colours	900923	PLA900923

Planet KG-SL10

HOW TO ORDER

Planet KG-SL10 FH+RD

SILVER ANODISED

Length	Max cut back	DIN L		DIN R	
		Item No.	Order code	Item No.	Order code
459mm	>335mm	39046-SL10L	PLA839/0459-SLLA00	39046-SL10R	PLA839/0459-SLRA00
584mm	>460mm	39059-SL10L	PLA839/0584-SLLA00	39059-SL10R	PLA839/0584-SLRA00
709mm	>585mm	39071-SL10L	PLA839/0709-SLLA00	39071-SL10R	PLA839/0709-SLRA00
834mm	>710mm	39084-SL10L	PLA839/0834-SLLA00	39084-SL10R	PLA839/0834-SLRA00
959mm	>835mm	39096-SL10L	PLA839/0959-SLLA00	39096-SL10R	PLA839/0959-SLRA00
1084mm	>960mm	39109-SL10L	PLA839/1084-SLLA00	39109-SL10R	PLA839/1084-SLRA00
1209mm	>1085mm	39121-SL10L	PLA839/1209-SLLA00	39121-SL10R	PLA839/1209-SLRA00
1334mm	>1210mm	39134-SL10L	PLA839/1334-SLLA00	39134-SL10R	PLA839/1334-SLRA00
1459mm	>1335mm	39146-SL10L	PLA839/1459-SLLA00	39146-SL10R	PLA839/1459-SLRA00
<6000mm per m	-	39160-SL10L	PLA839/6000-SLLA00	39160-SL10R	PLA839/6000-SLRA00

Planet KG-U FH+RD

MATT STAINLESS STEEL

Length	Max cut back	DIN L		DIN R	
		Item No.	Order code	Item No.	Order code
459mm	>335mm	39046-SL10XL	PLA839/0459H00	39046-SL10XR	PLA839/0459-SLRH00
584mm	>460mm	39059-SL10XL	PLA839/0584H00	39059-SL10XR	PLA839/0584-SLRH00
709mm	>585mm	39071-SL10XL	PLA839/0709H00	39071-SL10XR	PLA839/0709-SLRH00
834mm	>710mm	39084-SL10XL	PLA839/0834H00	39084-SL10XR	PLA839/0834-SLRH00
959mm	>835mm	39096-SL10XL	PLA839/0959H00	39096-SL10XR	PLA839/0959-SLRH00
1084mm	>960mm	39109-SL10XL	PLA839/1084H00	39109-SL10XR	PLA839/1084-SLRH00
1209mm	>1085mm	39121-SL10XL	PLA839/1209H00	39121-SL10XR	PLA839/1209-SLRH00
1334mm	>1210mm	39134-SL10XL	PLA839/1334H00	39134-SL10XR	PLA839/1334-SLRH00
1459mm	>1335mm	39146-SL10XL	PLA839/1459H00	39146-SL10XR	PLA839/1459-SLRH00
<6000mm per m	-	39600-SL10XL	PLA839/6000H00	39600-SL10XR	PLA839/6000-SLRH00

Options

Detail	Item No.	Order code
Cut to fixed dimensions	900225	PLA900225
Silicon protrusion	900440	PLA900440
Reinforced mechanics	900783	PLA900783
Round lip design	900910	PLA900910
Profiles in special colours	900923	PLA900923

Accessories

OPTIONAL

	Type	Size	Use with	Item No.	Order Code
	Stopping plate Type 1 (standard)		Planet KG-S narrow, Planet KG-SM set narrow, Planet KG-A8 A10 A12, Planet KG-F8 F10 F12s F16s, Planet KG-U, Planet KG-SL10	900014	PLA900014
	Stopping plate Type 2	38mm x 21mm incl. screws	Planet KG-S narrow, Planet KG-SM set narrow, Planet KG-A8 A10 A12, Planet KG-F8 F10 F12s F16s, Planet KG-U	900188	PLA900188
	Stopping plate Type 3	38mm x 21mm incl. screws	Planet KG-S narrow, Planet KG-SM set narrow, Planet KG-A8 A10 A12, Planet KG-F8 F10 F12s F16s, Planet KG-U	900395	PLA900395
	Adhesive tape set for Planet KG-S narrow		Planet KG-S narrow	900837	PLA900837
	Complete retrofit set for Planet KG-S narrow		Planet KG-S narrow	902208	PLA902208
	Assembly set (version 2025)		Planet KG-S narrow, Planet KG-SM set narrow, Planet KG-A8 A10 A12	902742	PLA902742