



AS SEALS

LP1004AS, LP1504AS, LP2004

Our AS door seal with elastomeric fin offers acoustic, smoke & fire protection. Available in a choice of sizes to cover 30 & 60 minute applications.

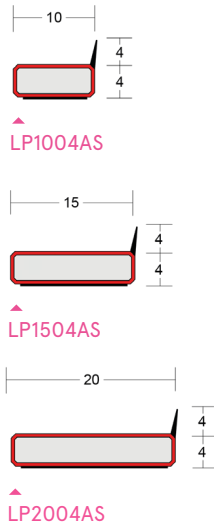

FD30 example:
AS seal (Shown with Batwing® & LAS8001 si)

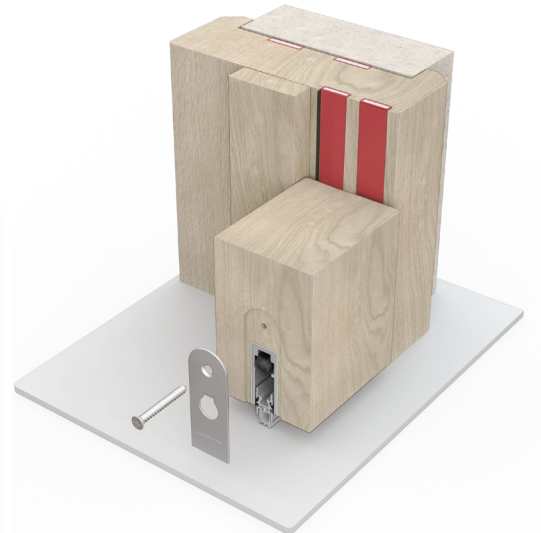

FD60 example:
AS seal (Shown with LP1504 fire seal & LAS8001 si + cladding kit)

▶▶ **Note:** It's essential to consult the manufacturer to determine exactly what configuration of seal & size of seal have been tested.

SYSTEM SPECIFICATIONS

Test evidence

- ▶ Fire: BS 476-22:1987 & BS EN 1634-1:2008.
- ▶ Smoke: BS 476-31.1: 1983 at ambient temperature.
- ▶ Assessment: CNA/F14171.
- ▶ Acoustic: BS EN ISO 10140-2:2010.
- ▶ Durability: 100,000 cycles.

Characteristics

- ▶ Protects against sound, smoke, and fire.
- ▶ Low frictional resistance for ease of door operation.

Location

- ▶ Single and double leaf doors.

Min/max gap size

- ▶ 3mm/4mm

Size

- ▶ 10 x 4mm, 15 x 4mm.
- ▶ 20 x 4mm non-standard.
- ▶ Other sizes available, please ask for details.

Minimum order quantity

- ▶ 20 x 4mm - 250 x 2.1m.

Use with

- ▶ Any architectural seals.

Seal material

- ▶ PVC encased sodium silicate and flexible elastomeric fin.

Fixing

- ▶ Heavy duty self-adhesive backing tape.

Standard lengths

- ▶ 1m and 2.1m.
- ▶ Other lengths to special order.

Finishes

- ▶ Black, white, dark brown, light brown and grey as standard.
- ▶ Cream and red are subject to MOQs and extended lead times.
- ▶ Black fin as standard.

Certification