

# AAS 7504

AURA®


## PERIMETER SEAL

*A compact perimeter seal ideal for acoustic and smoke containment. It can be used to replace the doorstop on steel or timber framed doors. We recommend the use of a door closer to aid closing control and to avoid excessive impact.*


### MEDIUM DUTY



AAS7504 ↓

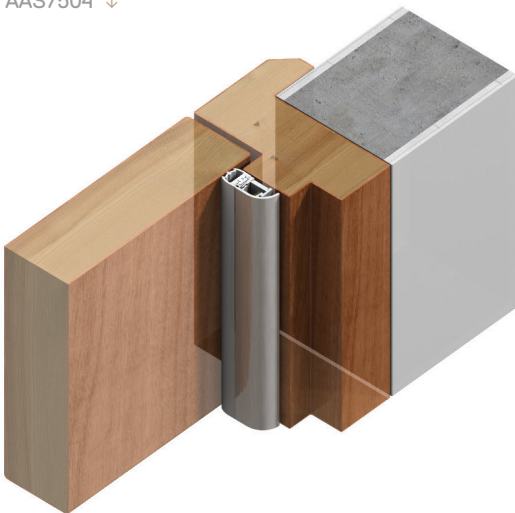

## TECHNICAL



AAS7504 ↑

### Location

Head and jambs of single swing doors

### Seal Material

Silicone

### Standard Lengths

- 1m and 2.1m
- Doorset packs 1x1m + 2x2.1m
- Other lengths available for special order

### Fixing

- Fixing holes pre-drilled and slotted for positional accuracy
- Wood screws supplied – please request self-tappers

### Finishes

- Silver anodised aluminium with Silver silicone gasket
- Bronze anodised aluminium with Black silicone gasket
- Decorative finishes available. Please enquire

## PERFORMANCE

### Acoustic

BS EN ISO 10140-2: 2010

### Weighted Sound Reduction Index

31 dB

(AAS7504 & AAS8501 on a standard architectural door)