


PERIMETER SEAL

Designed with a seamless curve for enhanced aesthetics, with proven performance for acoustic and smoke containment when installed around the head and jambs of doors. The decorative snap-on cover plate completely conceals fixings and is available in a range of finishes.


MEDIUM DUTY



AAS7501 ↓

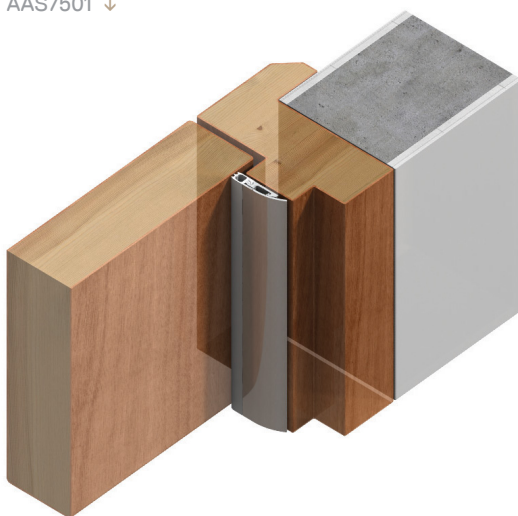

TECHNICAL



AAS7501 ↑

Location

Head and jambs of single swing doors

Seal Material

Silicone

Standard Lengths

- 1m and 2.1m
- Doorset packs 1x1m + 2x2.1m
- Other lengths available for special order

Fixing

- Fixing holes pre-drilled and slotted for positional accuracy
- Wood screws supplied – please request self-tappers

Finishes

- Silver anodised aluminium with Silver silicone gasket as standard
- Bronze anodised aluminium with Black silicone gasket are subject to non-standard charges and additional lead times
- Decorative finishes available. Please enquire

PERFORMANCE

Acoustic

BS EN ISO 10140-2: 2010

Weighted Sound Reduction Index

31 dB

(AAS7501 & AAS8501 on a standard architectural door)

Smoke

BS EN 1634-3: 2004 & BS 476-31.1: 1983 at ambient temperature.

Durability

1 million cycles on full-size door assemblies