

AAS 7502

AURA®


PERIMETER SEAL

A slimline perimeter seal featuring sweeping curves. Proven performance for acoustic and smoke containment when installed around the head and jambs of doors. The decorative cover strip completely conceals fixings and is available in a range of finishes.


MEDIUM DUTY



AAS7502 ↓

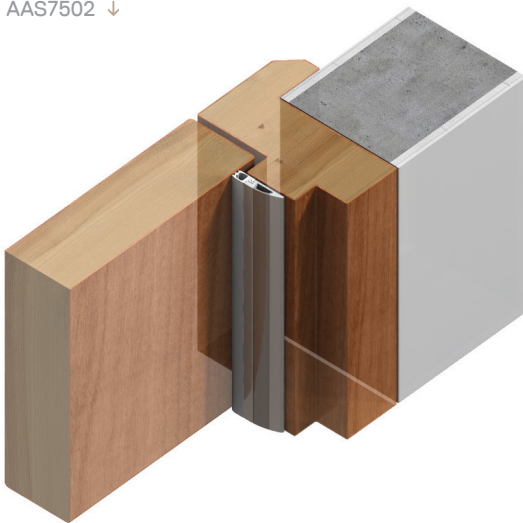

TECHNICAL



AAS7502 ↑

Location

Head and jambs of single swing doors

Seal Material

Silicone

Standard Lengths

- 1m and 2.1m
- Doorset packs 1x1m + 2x2.1m
- Other lengths available for special order

Fixing

- Fixing holes pre-drilled and slotted for positional accuracy
- Wood screws supplied – please request self-tappers

Finishes

- Silver anodised aluminium with Silver silicone gasket as standard
- Bronze anodised aluminium with Black silicone gasket are subject to non-standard charges and additional lead times
- Decorative finishes available. Please enquire

PERFORMANCE

Acoustic

BS EN ISO 10140-2: 2010

Weighted Sound Reduction Index

31 dB

(AAS7502 & AAS8501 on a standard architectural door)

Smoke

BS EN 1634-3: 2004 & BS 476-31.1: 1983 at ambient temperature.