


HINGE PROTECTION KITS

FD30 + FD60

Shaped pads of intumescent material, which provide fire resistance of 30 minutes or 60 minutes when fitted to full size door assemblies in accordance with BS EN 1363-1: 2012.

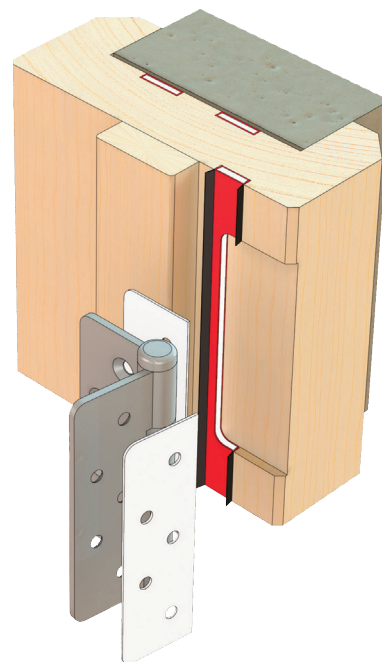

▲ Hinge protection kit

SYSTEM SPECIFICATIONS

Test evidence

- Fire: BS EN 1363-1: 2012.

Performance

- Can provide up to 30 or 60 minutes fire resistance.

Location

- Behind the door hinge leaf.

Use with

- Fire resistant hinges.

Seal material

- Mono Ammonium Phosphate (MAP) 1mm / 2mm.

Finishes

- Square or radius profile, with or without self-adhesive backing.

Fixing

- Wrap the intumescent jacket around the hinge.

Size

- Lorient can supply intumescent protection kits for commonly specified hinges e.g.: Royde & Tucker and Cooke Bros.