


# LAS9010 / LAS8001 si FITTING GUIDE

**NON-FIRE RATED  
BOTTOM OF DOOR**

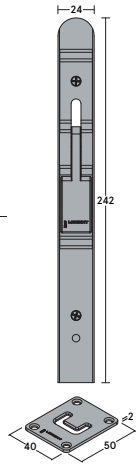

## KIT 3

LENGTH \_\_\_\_\_

### CONTENTS

- LAS9010 flush bolt
- LAS8001 si drop seal
- Fixings
- 1 x keep
- 1 x end plate
- 1 x bag of screws and plugs
- 1 x striker button

### TOOLS REQUIRED

- Tape measure
- Pencil or marker
- Saw (power/hack)
- Screwdriver
- Drill (power or hand)
- 2.5mm drill bit
- Knife
- Router
- Long series router bit



## INSTALLATION DETAIL

### STEP 1

Remove the products from the packaging.

### STEP 2

Remove the door from its hinges, lay on side and firmly hold. (If the door bottom is already grooved to suit the LAS8001 si, go to Step 5).

### STEP 3

Measure and mark the seal position on the bottom edge of the door. The seal must be positioned on the centre line of the door.

### STEP 4

Fit a suitable cutter to the router and set guide. Machine a 15mm wide by 35mm deep groove along the bottom of the door.

### STEP 5

Clear chips and dust from groove, check width and depth.

### STEP 6

Fit a suitable cutter to the router and set guide. Machine a 24mm wide by 21mm deep groove, 242mm long, centrally to the bottom leading edge of the door. Clear chips and dust from groove, check length, width and depth.

**WARNING:** Check maximum cut back lengths provided below. Measure the door width.

**CUT BACK SIZES:** Do not cut the seal shorter than the lengths indicated below or this will affect the normal operation of the internal mechanism.

335mm cuts to 255mm	835mm cuts to 735mm
435mm cuts to 335mm	935mm cuts to 835mm
535mm cuts to 435mm	1035mm cuts to 935mm
635mm cuts to 535mm	1135mm cuts to 1035mm
735mm cuts to 635mm	

### STEP 7

On the LAS8001 si, at the opposite end to the actuator button, pull back the gasket and using a power/hack saw, cut the aluminium sections 6mm less than the door width to allow for end plate and flush bolt. Remove cutting swarf/debris. Push the gasket back into position and cut to length with a sharp knife.

### STEP 8

Position LAS8001 si in the groove and mark the end plate position on the hinge jamb of the door. Cut out with a sharp chisel (or router for round end plates). Screw fix the flush bolt and slide the seal into the groove ensuring that the actuator button is on the hinge side. Next, screw fix the end plate to hold the seal in position.

### STEP 9

With the door leaf re-fitted, open and close the door observing the operation of the seal. Adjust accordingly by pulling out the actuator button clear of the housing. Firmly holding the threaded rod, turn the actuator button clockwise to reduce movement and anticlockwise to increase the seal movement.

### STEP 10

With the door in the closed position, activate flush bolt lever and mark the position for the keep on the threshold. Rebate keep into threshold and screw fix using fixings provided.

### STEP 11

(For timber frames, fix the striker button to the frame opposite the operating button.)

### NOTE

For optimum results the seal should be adjusted so that the silicone gasket touches the sill in the final closing moment of the door.

### NOTE

We recommend LAS9010 flush bolt and LAS8001 si drop seal be used together with a Lorient perimeter seal.

### NOTE

Recommendations as to methods, use of materials and construction details are based on the experience and knowledge of Lorient and are given in good faith as a general guide and service to designers, contractors and manufacturers.

Lorient reserves the right to make alterations or delete installation detail without prior notice.

V1



Lorient Polyproducts Ltd  
Endeavour House  
Fairfax Road  
Heathfield Ind Estate  
Newton Abbot  
Devon TQ12 6UD  
United Kingdom


+44 (0)1626 834252  
www.lorientgroup.com

All rights reserved. No part of this fitting guide may be reproduced, stored in a retrieval system, or transmitted in any means, electronic, mechanical, photocopying, recording or otherwise without the written permission of Lorient Polyproducts Limited.  
© Lorient Polyproducts Ltd 2019

# LAS9010

## FITTING GUIDE

### NON-FIRE RATED TOP OF DOOR

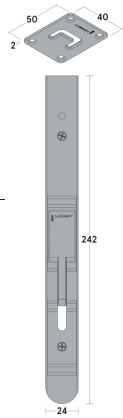

## INSTALLATION DETAIL

### STEP 1

Remove the products from the packaging.

### STEP 2

Remove the door from its hinges, lay on side and firmly hold.

### STEP 3

Fit a suitable cutter to the router and set guide. Machine a 24mm wide by 21mm deep groove, 242mm long, centrally to the top leading edge of the door. Clear chips and dust from groove, check length, width and depth.

### STEP 4

Screw fix the flush bolt into the rebate.

### STEP 5

With the door leaf re-fitted and in the closed position, activate flush bolt lever and mark the position for the keep on the frame head. Rebate keep into frame head and screw fix using fixings provided.



### KIT 3

#### CONTENTS

- LAS9010 flush bolt
- Fixings
- 1 x keep
- 1 x bag of screws

#### TOOLS REQUIRED

- Tape measure
- Pencil or marker
- Screwdriver
- Drill (power or hand)
- 2.5mm drill bit
- Router
- Long series router bit

### NOTE

Recommendations as to methods, use of materials and construction details are based on the experience and knowledge of Lorient and are given in good faith as a general guide and service to designers, contractors and manufacturers.

Lorient reserves the right to make alterations or delete installation detail without prior notice.

V1



Lorient Polyproducts Ltd  
Endeavour House  
Fairfax Road  
Heathfield Ind Estate  
Newton Abbot  
Devon TQ12 6UD  
United Kingdom

+44 (0)1626 834252  
[www.lorientgroup.com](http://www.lorientgroup.com)

All rights reserved. No part of this fitting guide may be reproduced, stored in a retrieval system, or transmitted in any means, electronic, mechanical, photocopying, recording or otherwise without the written permission of Lorient Polyproducts Limited.  
© Lorient Polyproducts Ltd 2019