


LAS1009 COMPRESSION SEAL

FITTING GUIDE



LENGTH _____

CONTENTS

- Kerf-fit LAS1009 seal

TOOLS REQUIRED

- Tape measure
- Pencil or marker
- Router with 3mm cutter
- Scissors, knife or snips
- Saw, hand or power
- Timber door stops
- Panel pins or screws

NOTE

Recommendations as to methods, use of materials and construction details are based on the experience and knowledge of Lorient and are given in good faith as a general guide and service to designers, contractors and manufacturers.

Lorient reserves the right to make alterations or delete any installation detail without prior notice.

INSTALLATION DETAIL

NOTE

Fitting the LAS1009 seal requires a 3mm x 4mm (min) deep groove. Min/max recommended gap size is 5mm/8mm.

STEP 1

Measure door frame opening and cut timber door stops to suit.

STEP 2

Using the router machine a 3mm wide x 4mm (min) deep groove along the door stop.

STEP 3

Clean out the routed grooves ensuring that it is free of sawdust.

STEP 4

Measure and cut the LAS1009 to the desired lengths allowing an additional 50mm.

STEP 5

Starting from one end and ensuring that the gasket is not stretched, offer the barbed end of the LAS1009 to the groove and push fit into place working progressively down the stop. Trim off excess seal.

STEP 6

Bring the door to the anticipated closed position and mount the first door stop so that there is a small amount of compression on the seal bulb.

NOTE

Do not over compress the seal as this will increase door latching forces.


STEP 7

Repeat with the other sides and check final operation of the door.

NOTE

Ensure that the installation of this product does not impede the opening or closing of the door. It is recommended to check the door seal periodically to ensure the door assembly to which it is fitted, closes and latches properly.

The seal may be cleaned periodically with a damp cloth and mild detergent.

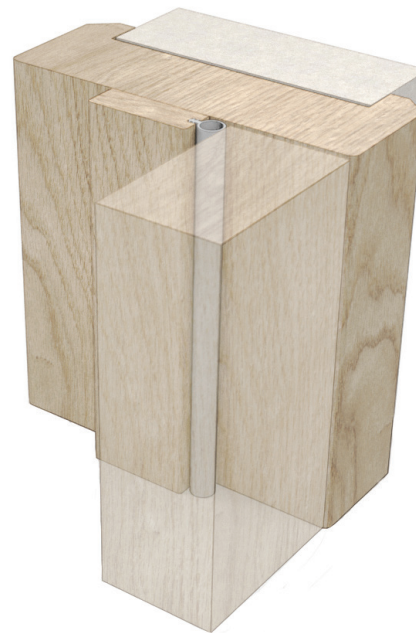

ASSA ABLOY LTD T/A LORIENT
Endeavour House
Fairfax Road
Heathfield Ind Estate
Newton Abbot
Devon TQ12 6UD
United Kingdom

+44 (0)1626 834252
www.lorient.com.au

All rights reserved. No part of this fitting guide may be reproduced, stored in a retrieval system, or transmitted in any means, electronic, mechanical, photocopying, recording or otherwise without the written permission of Lorient.

© 2024 ASSA ABLOY Ltd T/A Lorient. Lorient is a registered trade mark of ASSA ABLOY LIMITED in England.

For more information please call:

+44 (0)1626 834252

FITTING GUIDE - LAS1009 COMPRESSION SEAL

www.lorient.com