


DOOR BOTTOM SEALS


LAS3007 si

FACE-FIXED

The LAS3007 si door bottom seal is a multi-blade seal designed for easy installation without the need to remove the door, making it suitable for both new projects and retrofit applications. With concealed fixings and pre-drilled, slotted holes, the LAS3007 si allows for quick adjustments and compatibility with a choice of threshold plates. Its durable, anodised finish offers a sleek aesthetic, and its robust design can contribute to the effective containment of smoke, draughts, light, and weather, promoting a comfortable indoor environment.



LAS3007 si

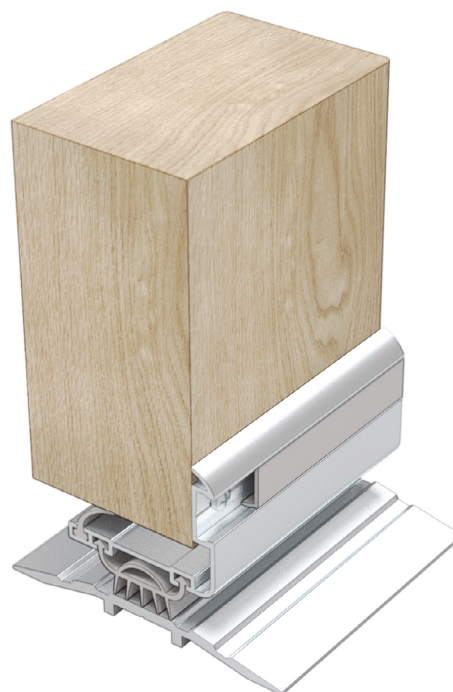

LAS3007 si (shown with LAS4010)

SYSTEM SPECIFICATIONS

Characteristics

- ▶ Contributes towards smoke, weather, draught, and light containment when fitted with a suitable threshold seal.

Location

- ▶ Single and double leaf doors.

Use with

- ▶ Practically any threshold plate, but ideally suited to LAS4015 si.

Min/max gap size

- ▶ 16mm/22mm.

Seal material

- ▶ Aluminium carrier with a flexible silicone rubber gasket.

- ▶ 1m and 2.1m. Other lengths to special order.

Fixing

- ▶ Self-tapping wood screws are supplied (self-drilling and self-tapping screws for metal construction available on request).
- ▶ Fixing holes are pre-drilled and slotted to allow the seals to be adjusted and positioned accurately. A PVC cover strip to conceal fixings is supplied.

Finishes

- ▶ Silver anodised aluminium with grey cover strip and grey silicone rubber blade.
- ▶ Bronze anodised aluminium with black cover strip and black silicone rubber blade are subject to non-standard charges and additional lead times.

Certification



(R27972)

Standard lengths

T: +44 (0)1626 834252
E: mktg@lorientuk.com

www.lorientgroup.com