


## DOOR BOTTOM SEALS

# LAS3010 si

## HEAVY DUTY

A heavy duty, multi-blade weather protective seal, which can be fitted without removing the door, and can be used with a choice of threshold plates. Concealed fixings, pre-drilled and slotted holes on LAS3010 si provide easy adjustment. Durable, anodised aesthetic finish.

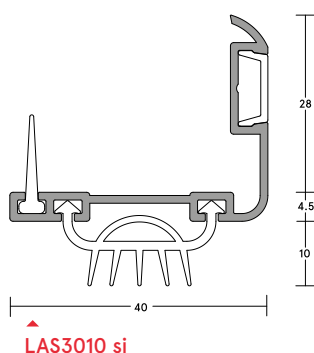

▲  
LAS3010 si

## SYSTEM SPECIFICATIONS

### Performance

- Protects against smoke, weather, draught, light and insects when fitted with a suitable threshold seal.

### Location

- Single and double leaf doors.

### Use with

- Practically any threshold plate, but ideally suited to the LAS4016.

### Min/max gap size

- 16mm – 20mm.

### Seal material

- Aluminium carrier with a flexible silicone rubber gasket.

### Standard lengths

- 1m and 2.1m.

### Fixing

- Self-tapping wood screws are supplied (self-drilling and self-tapping screws for metal construction available on request).
- Fixing holes are pre-drilled and slotted to allow the seals to be adjusted and positioned accurately. A PVC cover strip to conceal fixings is supplied

### Finishes

- Silver anodised aluminium with grey cover strip and grey silicone rubber gasket.