


LAS4050, LAS4055, LAS4060, LAS4065 THRESHOLD PLATES

FITTING GUIDE

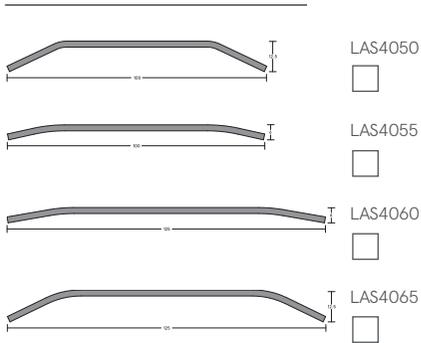

LENGTH _____

CONTENTS

- Stainless steel threshold plate
- Stainless steel screws and plugs

TOOLS REQUIRED

- Tape measure
- Pencil or marker
- Saw, hand or power
- Power drill
- 4.5mm drill bit
- 6mm masonry bit
- Countersink
- Sealant (optional)

INSTALLATION DETAIL

STEP 1

Remove the plate from the packaging and measure the door width, between jambs or door stops to determine plate length required.

STEP 2

Measure the threshold plate and mark the desired length (and profile if cutting around the door stop) with a pencil. Cut the threshold plate using a saw.

STEP 3

Position the plate on the door sill in required location.

STEP 4

With the plate in position, mark hole centres on floor. Using masonry drill, create fixing holes. Clean away dust and insert supplied plastic plugs.

STEP 5

Screw fix the threshold in place using the screws & plugs supplied.

NOTE

For exterior applications where threshold plate meets the door stop, sealant should be applied to prevent water ingress.

STEP 6

Check to ensure the door opens and closes freely.

NOTE

For effective door operation, the LAS4055 and LAS4060 threshold plates require a minimum of 8mm clearance, and the LAS4050 and LAS4065 threshold plates require a minimum of 15mm clearance between the door and the floor.

NOTE

Ensure that the installation of this product does not impede the opening or closing of the door.



NOTE

Recommendations as to methods, use of materials and construction details are based on the experience and knowledge of Lorient and are given in good faith as a general guide and service to designers, contractors and manufacturers.

Lorient reserves the right to make alterations or delete any installation detail without prior notice.



Gasketing materials for fire doors intended for application to wood and plastic covered composite and wood core doors rated up to 1.5 hours and listed steel frames and/or classified steel covered composite, hollow metal doors rated up to 3 hours.