

BRUSH SEALS


LAS5035, LAS5040, LAS5045, LAS5050 & LAS5055

HEAVY DUTY

Hard wearing, heavy duty brush seals, suitable for numerous installations and door types. Polypropylene brush seals with aluminium carriers. Flexible and durable. Quick and easy installation.



BRUSH SEALS

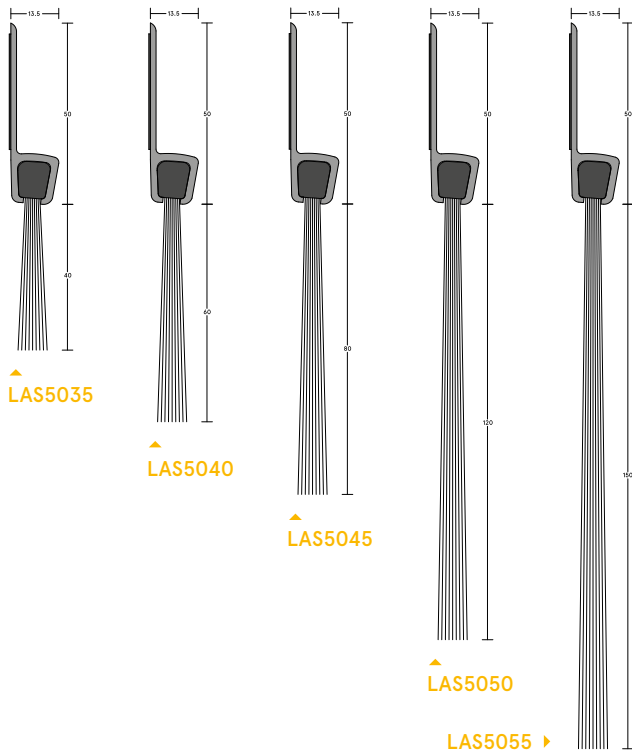

SYSTEM SPECIFICATIONS

Performance

- ▶ Meets smoke requirement: BS 9999: 2017.
- ▶ Protects against smoke, weather, draught and light.

Location

- ▶ Head, jambs, threshold and meeting stiles of single and double swing doors, and sliding doors.
- ▶ Head, jambs and threshold of revolving doors, up and over doors, and roller shutter doors.

Use with

- ▶ Any threshold plate.

Min/max gap size

- ▶ LAS5035: 20mm/40mm.
- ▶ LAS5040: 40mm/60mm.
- ▶ LAS5045: 60mm/80mm.
- ▶ LAS5050: 80mm/120mm.
- ▶ LAS5055: 120mm/150mm.

Seal material

- ▶ Polypropylene brush filaments, UV stabilised.

Standard lengths

- ▶ 1m and 2.1m.
- Other lengths to special order.

Fixing

- ▶ Heavy duty self-adhesive tape.
- ▶ Screw fixing recommended: screws not supplied.

Finishes

- ▶ Silver anodised aluminium with black brush filaments as standard.
- ▶ Bronze anodised aluminium with black brush filaments are subject to non-standard charges and additional lead times.