


## BRUSH SEALS


# LAS5060, LAS5065 & LAS5070

## FACE-FIXED


Hard wearing brush seals, with 90° aluminium carriers.  
Flexible and durable. Quick and easy installation.



LAS5060



LAS5065

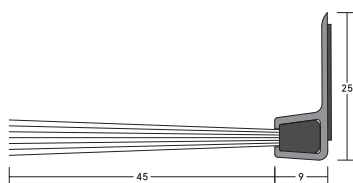

LAS5070



LAS5060

## SYSTEM SPECIFICATIONS

### Characteristics

- Contributes towards weather, draught, and light containment.

### Location

- Sliding doors.

### Min/max gap size

- LAS5060: 24mm/30mm.
- LAS5065: 32mm/40mm.
- LAS5070: 39mm/50mm.

### Seal material

- Polypropylene brush filaments, UV stabilised.

### Standard lengths

- 1m and 2.1m. Other lengths to special order.

### Fixing

- Heavy duty self-adhesive tape.
- Screw fixing recommended: screws not supplied.

### Finishes

- Silver anodised aluminium with black brush filaments as standard.
- Bronze anodised aluminium with black brush filaments are subject to non-standard charges and additional lead times.