

BRUSH SEALS


LAS5060, LAS5065 & LAS5070

MEDIUM DUTY


Hard wearing, medium duty brush seals, with 90° aluminium carriers. Flexible and durable. Quick and easy installation.




BRUSH SEALS



LAS5060



LAS5065

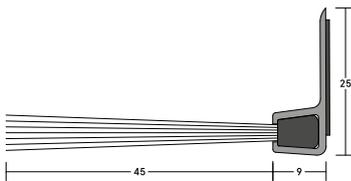

LAS5070



LAS5060

SYSTEM SPECIFICATIONS

Performance

- ▶ Protects against smoke, weather, draught and light.

Location

- ▶ Sliding doors.

Min/max gap size

- ▶ LAS5060: 24mm/30mm.
- ▶ LAS5065: 32mm/40mm.
- ▶ LAS5070: 39mm/50mm.

Seal material

- ▶ Polypropylene brush filaments, UV stabilised.

Standard lengths

- ▶ 1m and 2.1m. Other lengths to special order.

Fixing

- ▶ Heavy duty self-adhesive tape.
- ▶ Screw fixing recommended: screws not supplied.

Finishes

- ▶ Silver anodised aluminium with black brush filaments as standard.
- ▶ Bronze anodised aluminium with black brush filaments are subject to non-standard charges and additional lead times.