


BRUSH SEALS


LAS5075, LAS5080 & LAS5085

FACE-FIXED


Hard wearing, brush seals with 45° aluminium carriers.
Flexible and durable. Quick and easy installation.



LAS5075

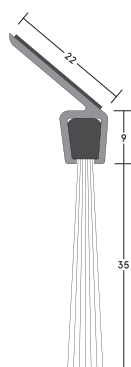

LAS5080

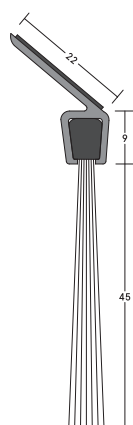

LAS5085



LAS5075

SYSTEM SPECIFICATIONS

Characteristics

- Contributes towards weather, draught, smoke and light containment.

Location

- A variety of industrial door applications requiring angled brushes.

Min/max gap size

- LAS5075: 19mm/25mm.
- LAS5080: 25mm/35mm.
- LAS5085: 35mm/45mm.

Seal material

- Polypropylene brush filaments, UV stabilised.

Standard lengths

- 1m and 2.1m. Other lengths to special order.

Fixing

- Heavy duty self-adhesive tape.
- Screw fixing recommended: screws not supplied.

Finishes

- Silver anodised aluminium with black brush filaments as standard.
- Bronze anodised aluminium with black brush filaments are subject to non-standard charges and additional lead times.