

BRUSH SEALS


LAS5075, LAS5080 & LAS5085

MEDIUM DUTY


Hard wearing, medium duty brush seals with 45° aluminium carriers. Flexible and durable. Quick and easy installation.




BRUSH SEALS



LAS5075

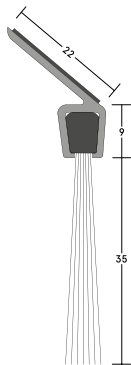

LAS5080

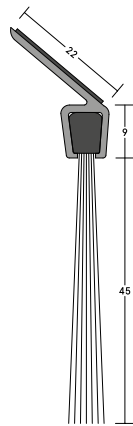

LAS5085



LAS5075

SYSTEM SPECIFICATIONS

Performance

- ▶ Protects against smoke, weather, draught and light.

Location

- ▶ A variety of industrial door applications requiring angled brushes.

Min/max gap size

- ▶ LAS5075: 19mm/25mm.
- ▶ LAS5080: 25mm/35mm.
- ▶ LAS5085: 35mm/45mm.

Seal material

- ▶ Polypropylene brush filaments, UV stabilised.

Standard lengths

- ▶ 1m and 2.1m. Other lengths to special order.

Fixing

- ▶ Heavy duty self-adhesive tape.
- ▶ Screw fixing recommended: screws not supplied.

Finishes

- ▶ Silver anodised aluminium with black brush filaments as standard.
- ▶ Bronze anodised aluminium with black brush filaments are subject to non-standard charges and additional lead times.