



LAS7004 si

FACE-FIXED **34dB**


Slimline, perimeter seal designed for timber doors with plain or rebated meeting stiles and where a centre latch is required. The leg of this seal can be cut out to accommodate the latch plate. Easily installed without removing the door.



▲ LAS7004 si
4mm



▲ LAS7004 si
6mm

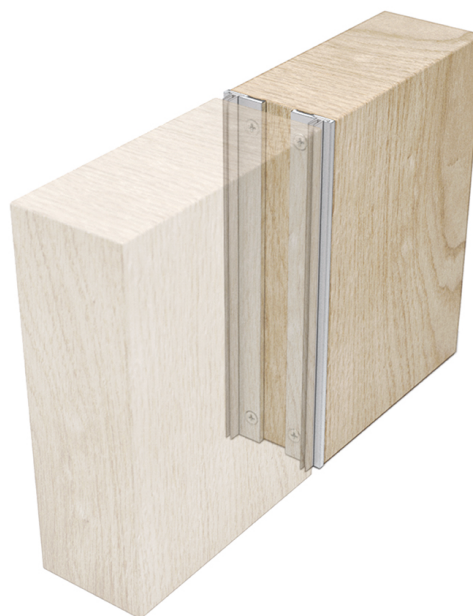

▲ LAS7004 si

SYSTEM SPECIFICATIONS

Test evidence

- ▶ Acoustic: BS EN ISO 10140-2:2010 (up to Rw 34dB).
- ▶ Note: two rows of twin elastomeric fins will provide optimum acoustic performance.

Characteristics

- ▶ Contributes towards sound, smoke, draught, weather, and light containment.

Location

- ▶ Meeting stiles of single and double swing doors.
- ▶ Sliding and revolving doors.

Use with

- ▶ Practically any threshold seal.

Seal material

- ▶ Choose from: (i) 4mm projection twin elastomeric fins (ii) 6mm projection twin elastomeric fins.

Standard lengths

- ▶ 1m and 2.1m. Other lengths to special order.

Fixing

- ▶ Wood screws are supplied (self-tapping screws for metal frames are available on request).
- ▶ Fixing holes are predrilled and countersunk.

Finishes

- ▶ Silver anodised aluminium with grey cover strip and grey silicone rubber gasket as standard.
- ▶ Bronze anodised aluminium with black cover strip and black silicone rubber gasket or other powder-coated colour finishes are subject to non-standard charges and additional lead times.