

FIRE DOOR 11

LVH44 AIR TRANSFER GRILLE FITTED INTO TIMBER FRAME WITH ANGLE FIXINGS

DESCRIPTION


- 1** Timber frame as part of associated doorset framing system
 - 2** Lorient intumescent sealant around LVH44 perimeter to a maximum clearance of 10mm
 - 3** Lorient LVH44 intumescent air transfer grille
 - 4** 2mm intumescent liner
 - 5** **Fixing angle:** 20 x 20 x 1mm thick minimum galvanised steel angles fixed to air transfer grille unit with self tapping screws and to timber frame with wood screws
- Fixing option 1:** 20mm wide angle tabs, central to all four sides or at 200mm maximum centres
- Fixing option 2:** Full width angles top and bottom only with 200mm fixing centres

CONTENTS

- LVH44 air transfer grille
- 2mm intumescent liner
- Cover grille (optional)

TOOLS REQUIRED

- Angle fixings
- Self tapping screws (3.5 x 16mm)
- 25mm wood screws
- Lorient intumescent sealant

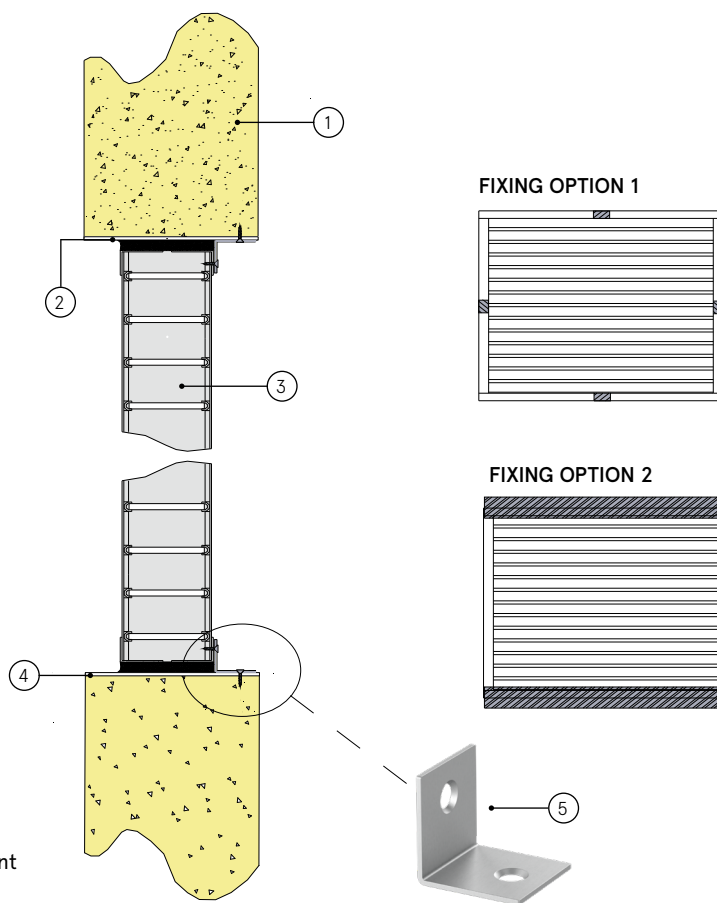

LVH44 for timber frame with angle fixings

FD30/FD60

Fire Resistance in accordance with

BS 476-22:1987

Approval Ref

WFRC C121316 (AW4T1)

Max single cell size

Any rectangular shape up
to 1200 x 600mm

LVH44 air transfer grilles are supplied 2mm
less than the nominal size e.g. a 300mm x
300mm is actually 298mm x 298mm.

INSTALLATION INSTRUCTIONS

- ▶ Apply Lorient intumescent liner to the inside faces of the aperture.
- ▶ Fix the mounting angles onto the LVH44 air transfer grille using self tapping screws to **one side only**.
- ▶ Insert LVH44 into timber frame. (Note: air transfer grille does not have to be centrally positioned in the opening).
- ▶ Fix the angles to the timber frame with wood screws.
- ▶ Apply a bead of Lorient intumescent sealant around the perimeter of LVH44 as shown (note: maximum clearance of 10mm applies).
- ▶ **Note:** Fixings supplied by others.