


LVV40 NOMOGRAM FOR WALL/DOOR MOUNTED APPLICATIONS

► **Performance Criteria:** The acoustic + aerodynamic performance is based on a wall/door mounted application with a Lorient Polyproducts LVV40 intumescent air transfer grille fitted with cover grilles.

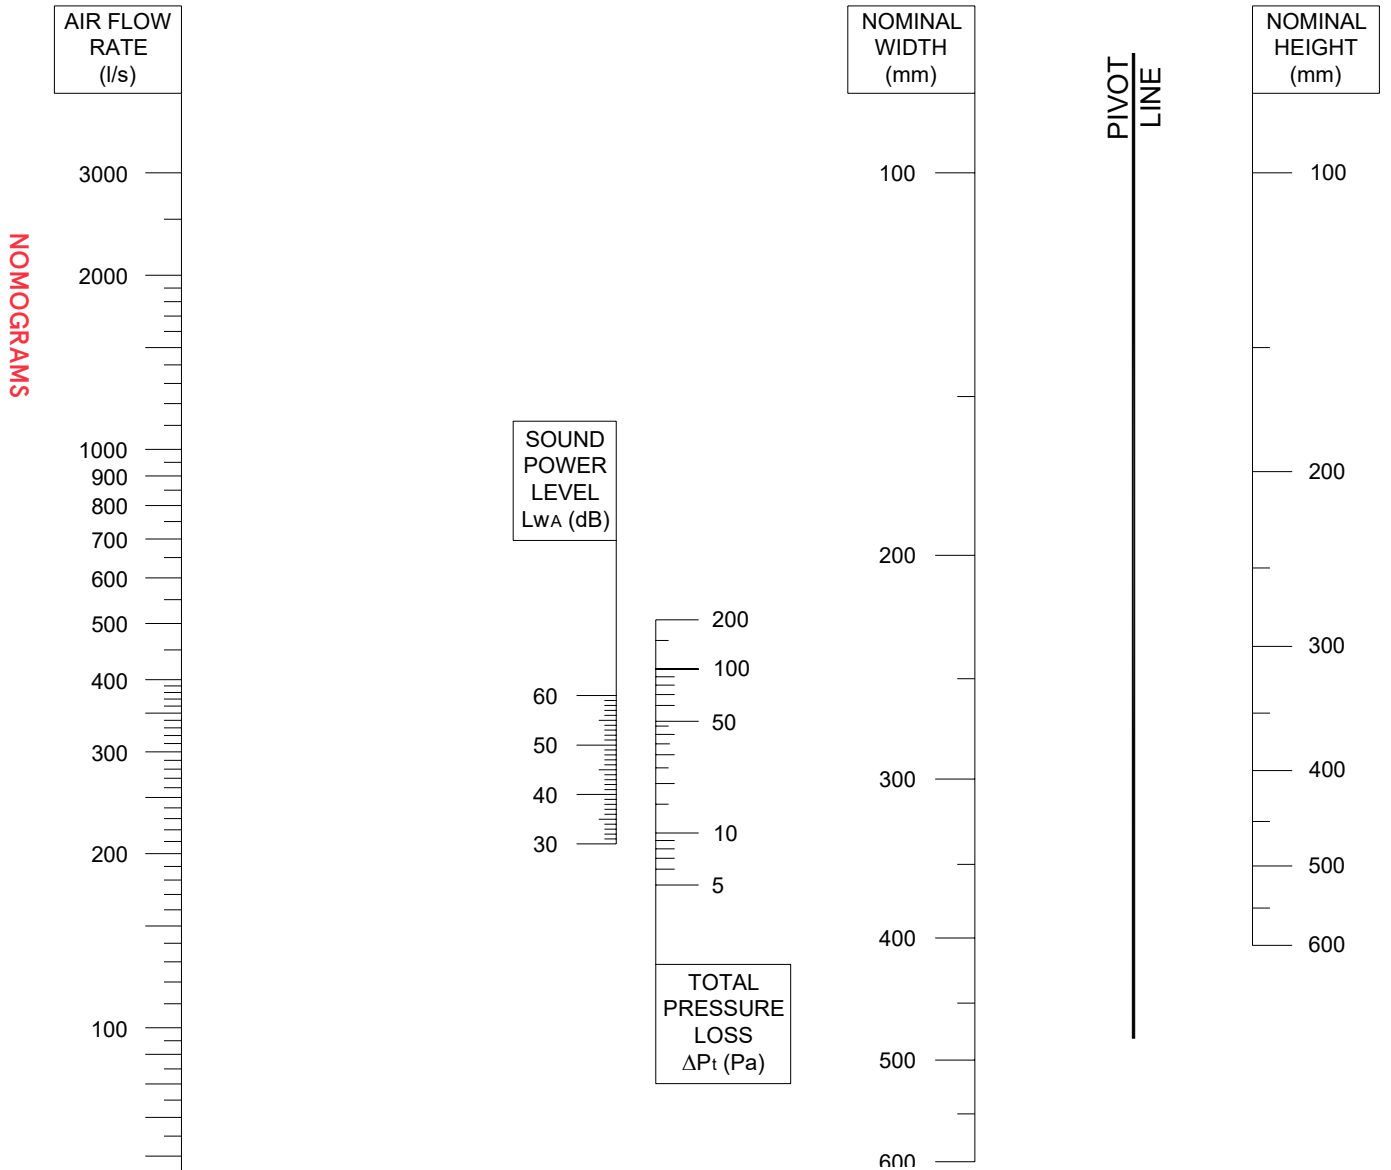

Example:

Determine the total pressure drop ΔP_t (Pa) and the radiated sound power level $L_{w,A}$ (dB) for a Lorient Polyproducts 200 x 200 LVV40 intumescent damper for a volume flow rate of 150 (l/s).

On the chart, draw a straight line from 200 on the nominal width axis to 200 on the nominal height axis. At the intersection point with the pivot line, draw a line to 150 (l/s) on the flow rate axis. The radiated sound power $L_{w,A}$ (dB) and total pressure drop ΔP_t (Pa) may now be read directly.

Type: Lorient Polyproducts LVV40 200 x 200

Flow rate (l/s): 150

Total pressure drop ΔP_t (Pa): 52

Radiated sound power $L_{w,A}$ (dB): 52

