# RJ008 LETTERPLATE

Designed to meet the exacting security standards of TS008:2015, the RJ008 letterplate is tested to withstand a series of physical tests based on the common methods of burglary. Providing up to 60 minutes fire resistance, this high performance letterplate is available in a number of stylish finishes.


# Key benefits

- Tested to TS008:2015
- No visible fixings
- Anti-vandal<sup>®</sup> feature
- > 37° opening to protect against 'key fishing'
- Quick and easy to install
- Can withstand thousands of openings
- Smooth working mechanism.





# RJ008 Letterplate

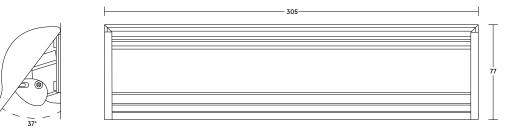

## SYSTEM SPECIFICATIONS

## Test evidence

- ▶ Fire: BS 476-22:1987 in an FD30.
- Fire: BS 476-22:1987 in an FD60.
- Security: PAS 24:2016.
- Classified to TS008:2015.
- Durability: 15,000 cycles.

#### Performance

• Can provide 30 and 60 minutes fire resistance.

## **Material**

Aluminium outer casing with an intumescent lining.

## Internal frame sizes

- ▶ 300mm x 115mm.
- Projection: 35mm.

# External frame sizes

- 305mm x 77mm.
- Distance between screw
- holes: 277mm.
- Mail aperture: 53mm x 260mm.

#### Door thickness

- 44mm timber door.
- > 54mm timber door.

#### Finishes

 Black, white, polished silver, gold and silver anodised aluminium.

#### Accreditation

BSI certified for PAS 24:2016.

