LETTERPLATES


RJ008 LETTERPLATE

Designed to meet the exacting security standards of TS008:2015, the RJ008 letterplate is tested to withstand a series of physical tests based on the common methods of burglary. Providing up to 60 minutes fire resistance, this high performance letterplate is available in a number of stylish finishes.




Key benefits

- Tested to TS008:2015
- No visible fixings
- Anti-vandal[®] feature
- > 37° opening to protect against 'key fishing'
- Quick and easy to install
- Can withstand thousands of openings
- Smooth working mechanism.



RJ008 Letterplate

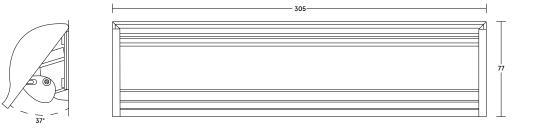

SYSTEM SPECIFICATIONS

Test evidence

- Fire: BS 476-22:1987 in an FD30.
- Fire: BS 476-22:1987 in an FD60.
- > Smoke: BS EN 1634-3:2004.
- > Security: PAS 24:2016.
- Classified to TS008:2015.
- > Durability: 20,000 cycles.

Performance

 Can provide 30 and 60 minutes fire resistance.

Material

 Aluminium outer casing with an intumescent lining.

Internal Projection

▶ 40mm.

Internal frame sizes

▶ 300mm x 115mm.

External frame sizes

> 305mm x 77mm.

- Distance between screw holes: 277mm.
- Mail aperture: 234mm x 32mm.

Door thickness

- 44mm timber door.
- > 54mm timber door.

Finishes

- Silver, polished silver, and gold as standard.
- Black, white, non-standard,

Certification

BSI certified for PAS 24:2016.

V3

