


# SS SEALS

LP1004SS, LP1504SS, LP2004SS, LP2504SS


Our SS door seal with polypropylene brush pile offers fire + smoke protection with the added benefit of thermal containment. Available in a choice of sizes to cover 30 + 60 minute applications, the SS seal also includes integral antimicrobial protection.




ACOUSTIC, SMOKE + FIRE SEALS




LP1004SS




LP1504SS



LP2004SS



LP2504SS

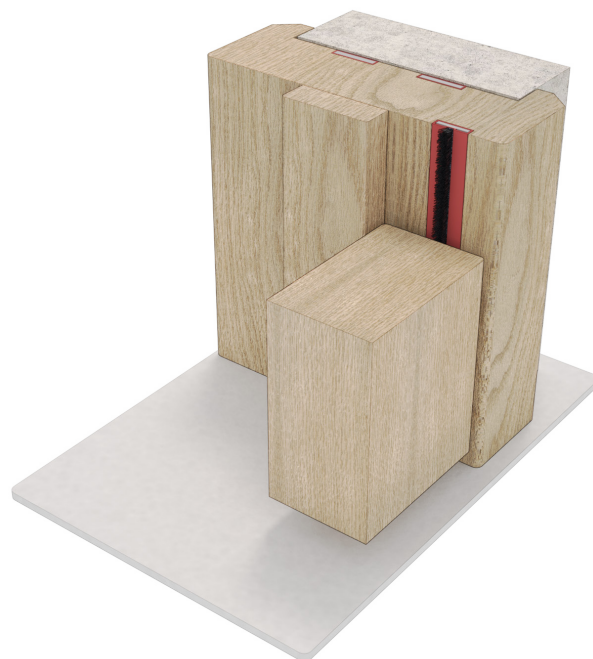

SS seal

## SYSTEM SPECIFICATIONS

### Test evidence

- ▶ Acoustic: BS EN ISO 10140-2: 2010.
- ▶ Smoke: BS 476-31.1: 1983.
- ▶ Fire: BS EN 1634-1: 2008.
- ▶ Fire: BS 476-22: 1987.
- ▶ Durability: 100,000 cycles.

### Performance

- ▶ Meets smoke requirements BS 9999:2017.
- ▶ Protects against sound, smoke, and fire.
- ▶ Thermal containment.
- ▶ Suitable for wheeled traffic.
- ▶ Exceptionally low frictional resistance for ease of door operation (Approved Document M).
- ▶ Integral antimicrobial protection.

### Location

- ▶ Single and double leaf doors.

### Size

- ▶ 10 x 4mm.
- ▶ 15 x 4mm.
- ▶ 20 x 4mm.
- ▶ 25 x 4mm.
- ▶ Other sizes available, please ask for details.

### Use with

- ▶ Any architectural seals.

### Min/max gap size

- ▶ 3mm/4mm.

### Seal material

- ▶ PVC encased sodium silicate and polypropylene brush pile (4mm or 6mm).

### Standard lengths

- ▶ 1m and 2.1m.
- ▶ Other lengths to special order.

### Fixing

- ▶ Heavy duty self-adhesive backing tape.

### Finishes

- ▶ Available in a range of standard colours, plus woodgrain and metallic finishes for superior aesthetics.
- ▶ Black brush pile. Grey brush also available (non-standard – charges and lead times apply).

### Accreditations



(CF330 & CF341)