


STEEL COVER GRILLES (RVCG)

Lorient steel cover grilles are face fixed to doors, walls or end of ducts, offering an aesthetic appearance to the range of intumescent air transfer grilles. They are supplied with a powder coat finish and fixing screws as standard.



FIRE + SMOKE RESISTANT AIR TRANSFER GRILLES

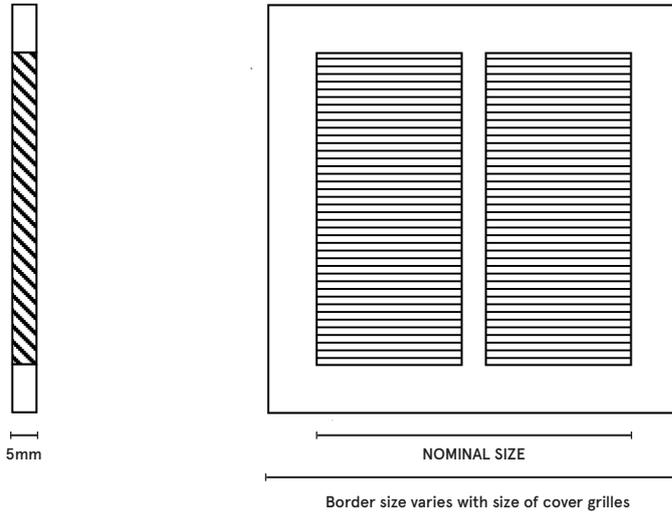

Mild steel grille

AIR TRANSFER GRILLE / COVER GRILLE SELECTOR (MM)

ATG NOMINAL SIZE	200 X 200	300 x 300	400 x 400
ATG ACTUAL SIZE	198 X 198	298 X 298	398 X 398
	205 x 205	305 x 305	405 x 405
MAX APERTURE SIZE	210 x 210	310 x 310	410 x 410
	Doors + 5mm	Doors + 5mm	Doors + 5mm
	Walls +10mm	Walls +10mm	Walls +10mm
COVER GRILLE OVERALL SIZE	251 x 251	351 x 351	451 x 451
	(+51mm of actual size)	(+51mm of actual size)	(+51mm of actual size)

F + S AIR TRANSFER GRILLE / COVER GRILLE SELECTOR

ATG NOMINAL SIZE	200 X 200	300 x 300	400 x 400
ATG ACTUAL SIZE	240 x 240	340 x 340	440 x 440
	245 x 245	345 x 345	445 x 445
MAX APERTURE SIZE	250 x 250	350 x 350	450 x 450
	Doors + 5mm	Doors + 5mm	Doors + 5mm
	Walls +10mm	Walls +10mm	Walls +10mm
COVER GRILLE OVERALL SIZE	341 x 341	441 x 441	541 x 541
	(+101mm of actual size)	(+101mm of actual size)	(+101mm of actual size)

SYSTEM SPECIFICATIONS

Construction

- ▶ Manufactured from 20swg mild steel with pre-set angled vanes at a 30° downward deflection and 8.5mm pitch. Vanes are horizontal and allow bi-directional airflow.

Size

- ▶ Cover grilles can be supplied in a wide range of sizes to suit the intumescent air transfer grilles. Sizes from 100 x 100mm up to 600 x 600mm in 50mm increments, in either configuration, offer great flexibility when selecting grille sizes.
- ▶ Each cover grille is manufactured to the nominal aperture size + 51mm.

Material

- ▶ Pressed steel and aluminium options available.

Free area

- ▶ Typical free areas of steel cover grilles are:
 - ▶ 150 x 150mm: 67%
 - ▶ 200 x 200mm: 65%
 - ▶ 300 x 300mm: 69%
 - ▶ 450 x 450mm: 70%
 - ▶ 600 x 600mm: 70%
- ▶ Note: Will change the free air flow characteristics of the air transfer grille.

Application

- ▶ Suitable for walls, doors or end of ducts.
- ▶ Weather louvre options available for external applications.
- ▶ Note: Not recommended for external wall applications or high levels of moisture. Please refer to weather louvres which can be supplied as alternatives.

Finish

- ▶ Standard powder coat finishes are white and silver.
- ▶ Other colours to suit customer requirements are available. (Non-standard - charges and lead times apply).

Fixing

- ▶ Screw fixed. Supplied with fixing screws as standard.
- ▶ Max aperture size is the ATG actual size +10mm for walls and +5mm for doors.

Use with

- ▶ LVV40, LVH44, LVV40S, LVH44S + LVH20S.