

LETTERPLATES

RJ008 LETTERPLATE

Designed to meet the exacting security standards of TS008:2015, the RJ008 letterplate is tested to withstand a series of physical tests based on the common methods of burglary. Providing up to 60 minutes fire resistance, this high performance letterplate is available in a number of stylish finishes.





Key benefits

- ▶ Tested to TS008:2015
- ▶ No visible fixings
- ▶ Anti-vandal® feature
- ▶ 37° opening to protect against 'key fishing'
- ▶ Quick and easy to install
- ▶ Can withstand thousands of openings
- ▶ Smooth working mechanism.



▶ RJ008 Letterplate

FIRE RESISTANT DOOR HARDWARE

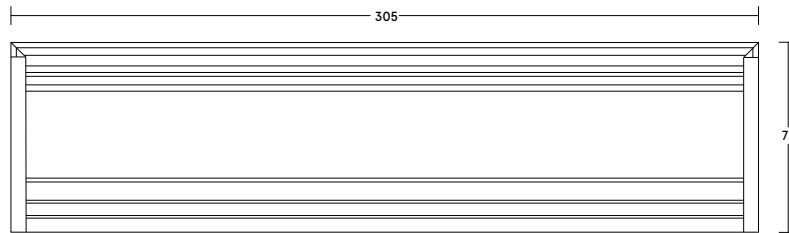

SYSTEM SPECIFICATIONS

Test evidence

- ▶ Fire: BS 476-22:1987 in an FD30.
- ▶ Fire: BS 476-22:1987 in an FD60.
- ▶ Smoke: BS EN 1634-3:2004.
- ▶ Security: PAS 24:2016.
- ▶ Classified to TS008:2015.
- ▶ Durability: 20,000 cycles.

Performance

- ▶ Can provide 30 and 60 minutes fire resistance.

Material

- ▶ Aluminium outer casing with an intumescent lining.

Internal Projection

- ▶ 40mm.

Internal frame sizes

- ▶ 300mm x 115mm.

External frame sizes

- ▶ 305mm x 77mm.
- ▶ Distance between screw holes: 277mm.
- ▶ Mail aperture: 234mm x 32mm.

Door thickness

- ▶ 44mm timber door.
- ▶ 54mm timber door.

Finishes

- ▶ Black, white, polished silver, gold and silver anodised aluminium.

Accreditation

- ▶ BSI certified for PAS 24:2016.