



TS SEALS

LP1004TS LP1504TS, LP2004TS

Our TS door seal with double elastomeric fins offers acoustic, smoke + fire protection. Available in a choice of sizes to cover 30 and 60 minute applications.




LP1004TS




LP1504TS



LP2004TS

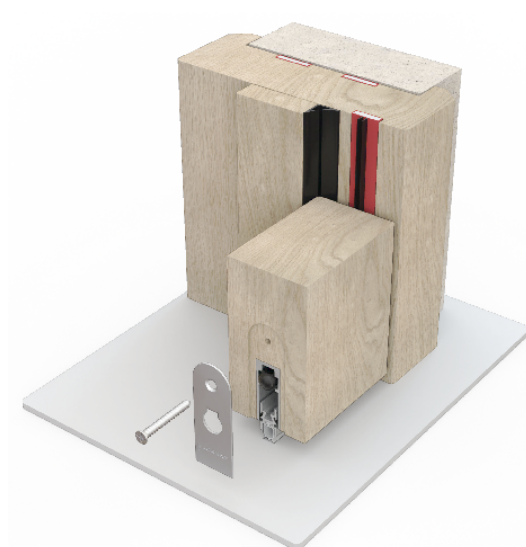

FD30 example:
TS seal (Shown with Batwing® & LAS8001 si)

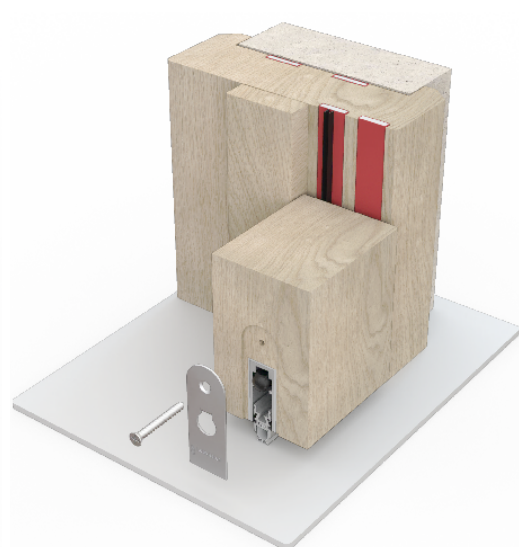

FD60 example:
TS seal (Shown with with LP1504 fire seal & LAS8001 si + cladding kit)

►► **Note:** It's essential to consult the manufacturer to determine exactly what configuration of seal & size of seal have been tested.

SYSTEM SPECIFICATIONS

Test evidence

- Fire: BS 476-22:1987 & BS EN 1634-1:2008.
- Smoke: BS 476-31.1: 1983 at ambient temperature.
- Assessment: CNA/F14171.
- Acoustic: BS EN ISO 10140-2:2010.
- Durability: 100,000 cycles.

Characteristics

- Protects against sound, smoke, and fire.
- Low frictional resistance for ease of door operation.

Location

- Single and double leaf doors.

Min/max gap size

- 3mm/4mm

Size

- 10 x 4mm, 15 x 4mm, 20 x 4mm.
- Other sizes available, please ask for details.

Use with

- Any architectural seals.

Seal material

- PVC encased sodium silicate and flexible elastomeric fins.

Fixing

- Heavy duty self-adhesive backing tape.

Standard lengths

- 1m and 2.1m.
- Other lengths to special order.

Finishes

- Black, white, dark brown, light brown and grey as standard.
- Cream, red, silver & woodgrains are subject to MOQs.
- Black fins as standard.

Certification